

# Delock 19" Optical Fiber Splice Box 6 x LC Duplex OS2 1U complete assembled

## Description

This pre-assembled optical fiber splice box by Delock can be mounted in a 19" rack and is ideal for quickly and securely setting up the fiber optic network in buildings.

### Complete assembled

The optical fiber box is equipped with 6 LC Duplex couplers and fitted with 12 pigtails, which are already inserted in the splice cassette.

### With drawer

The front panel can be pulled out, making it possible to work on both sides of the couplers without removing the cover.

## Note

The pigtails are not ready for splicing.



**Item no. 66997**

EAN: 4043619669974

Country of origin: China

Package: Box


## Technical details

- For mounting in 19" racks, 1U
- Splice box with 6 x LC Duplex couplers
- Extendable tray
- With splice cassette
- Fiber pigtails are coloured in accordance with TIA/EIA-598
- OS2 pigtails
- Fibre: 9/125 µm
- Cable jacket material: LSOH
- Cable length: ca. 1.5 m
- Housing colour: black
- Housing material: metal
- Dimensions (LxWxH): ca. 482 x 220 x 44 mm

## Package content

- 19" optical fiber splice box
- 4 x screw
- 4 x caged nut
- 4 x washer

## Images

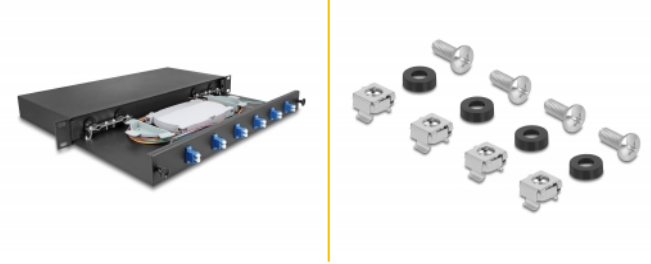

## General

Mounting type:	19 in
----------------	-------

## Physical characteristics

Housing colour:	black
Housing material:	metal
Cable length:	1.5 m
Length:	482 mm
Width:	220 mm
Height:	44 mm