
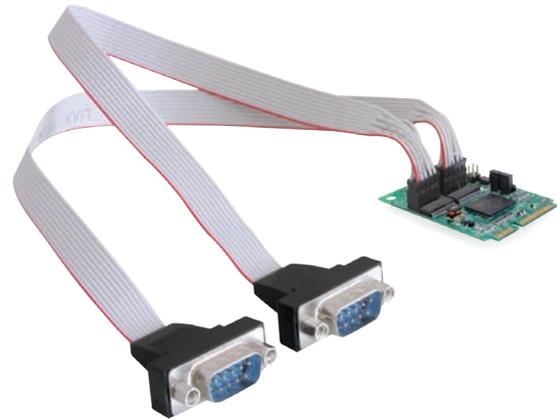


MiniPCIe I/O PCIe full size 2 x serial RS-232 with Power Management

Description

This miniPCIe adapter by Delock expands your system either by 2 additional COM ports on your mainboard or you may lead out the serial interface. You can connect different serial devices like printer, scanner, modem etc. to this adapter.

Images

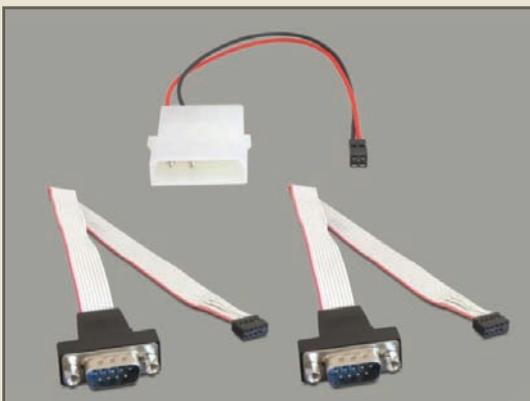

Ref.	95226
EAN	4043619952267
Country of origin	Taiwan
Customs tariff number	84733020

Specification

- Chipset: Oxford OXPCIe952
- Form factor: miniPCIe full size
- Interface: PCI Express Revision 1.1a
- Connector:
 - PCB: 2 x 9 pin COM port pin header
 - 1 x 2 pin power connector
 - cable: 2 x serial RS-232 DB9 male with screw nuts
 - 1 x 2 pin Molex
- Data transfer rate up to 460 Kb/s
- Compatible with 16950 UART
- FIFO: 128 byte
- Supports PCIe Power Management
- 5 V or 12 V voltage can be set individually for each port through the jumper (DB9 Pin9)
- Cable length with connector: ca. 30 cm
- Operating temperature: 0 °C ~ 85 °C
- Storage temperature: -20 °C ~ 95 °C

System requirement

- Windows XP/Vista/7/7-64
- Mainboard with a free miniPCIe slot with a PCIe interface

Package content

- MiniPCIe module
- 2 serial connecting cable
- 1 Molex power cable
- Driver CD, user manual

Package

- Blister