
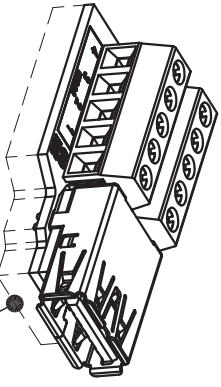
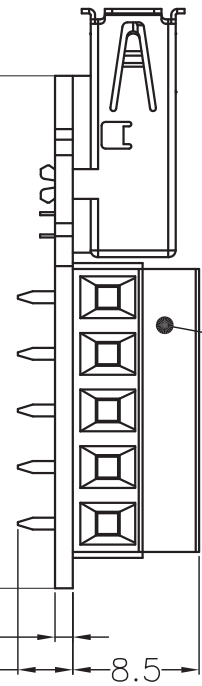
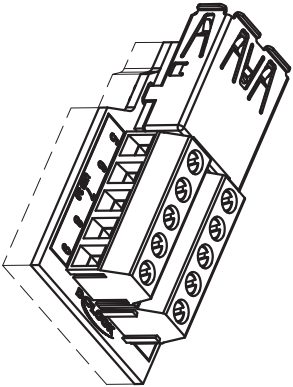
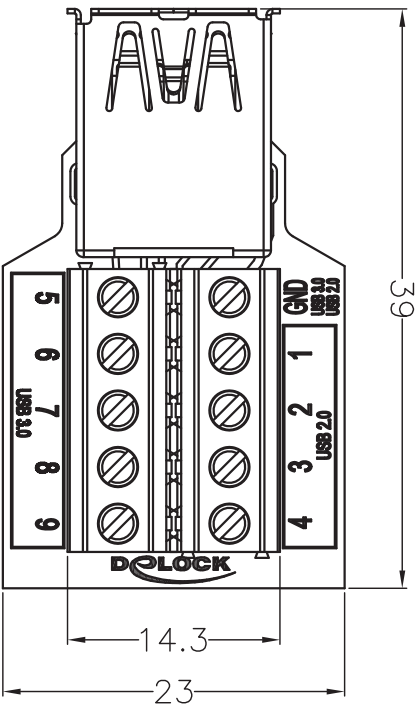


REV		REVISIONS		DATE	APPROVED
DESCRIPTION				7/11/11	Lin den Ping
A	INITIAL RELEASE				


WIRING TABLE		
USB2.0 Pin #	USB3.0 Pin #	terminal Block
1		1
2		2
3		3
4		4
	5	5
	6	6
	7	7
	8	8
	9	9
SHL	SHL	GND

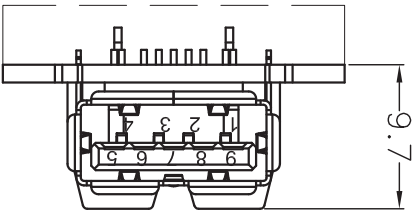

EVA, T=4mm

Electrical Character:

- 1> 100% open&short testing
- 2> With understanding voltage:DC 500 V 0.01 Sec.
- 3> Insulation Resistance: 50M Ohm (Min)
- 4> Conductive Resistance: 2 Ohm(Max)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN mm		APPROVALS		DATE	<div><b>DLOCK®</b></div> <div>we move the world</div> <div>Item no. 65370</div> <div>Barcode: 4043619653706</div> <div>File: 88072</div>
DIMENSIONAL TOLERANCES:		DRAWN BY		1/20/2012	
X = ±0.3 .XX = ±0.2 .XXX = ±0.1		CHECKED BY		1/20/2012	
ANGULAR TOLERANCES:		APPROVED BY		1/31/2012	
ALL = ± 1°		CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
PROJECTION		COLOR VARIATIONS MAY OCCUR			
					

Part name:  
Adapter USB3.0 A Female > terminal block