


# C6 MOUNT BOX UTP

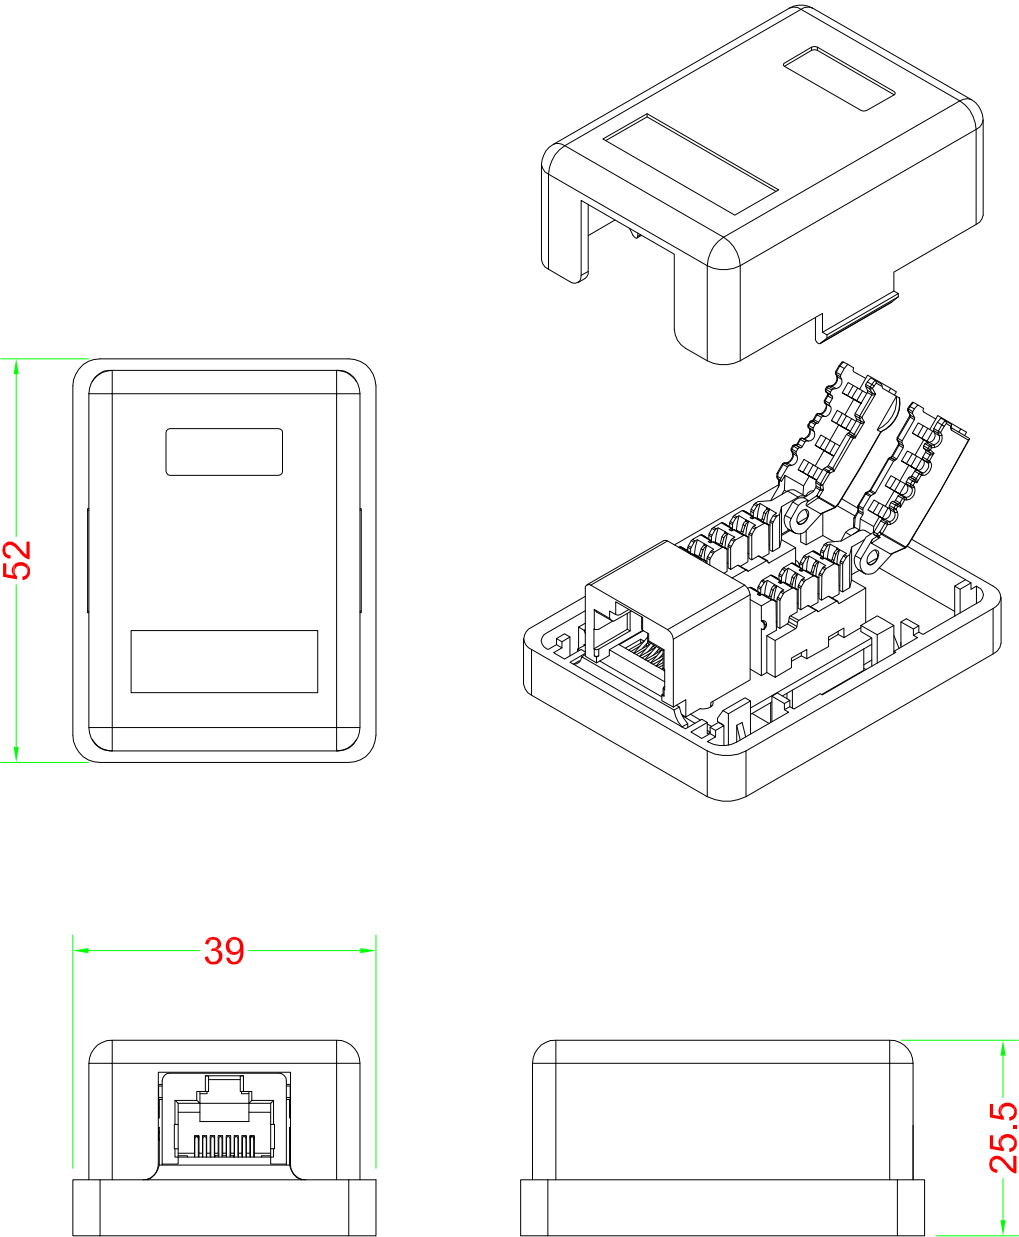

## Performance:

Meets C6 EIA/TIA 568B Standard.

## Materials:

Body : Fireproof ABS UL-94V0  
Jack : 8P8C 50 micro inches gold plated  
PCB : FR-4 / UL-94V0  
IDC Cap : Fireproof PC  
IDC Body : Fireproof ABS UL-94V0  
IDC Pin : Phosphor Bronze & Tinned

IDC Description : For 22-26 AWG.  
For 110 or Krone punch-down Tool  
Toolless (when use IDC cap directly)


## Electrical Specifications:

Insulation Resistance : 500M ohms (min.)  
Contact Resistance : 20m ohms (max.)  
Current Rating : 1.5 Amps .  
DC Resistance : 0.1 ohms (max.)  
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

## Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)  
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	
	APPR	CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	• ± 1    • X ± 0.2    • XX ± 0.15