



A

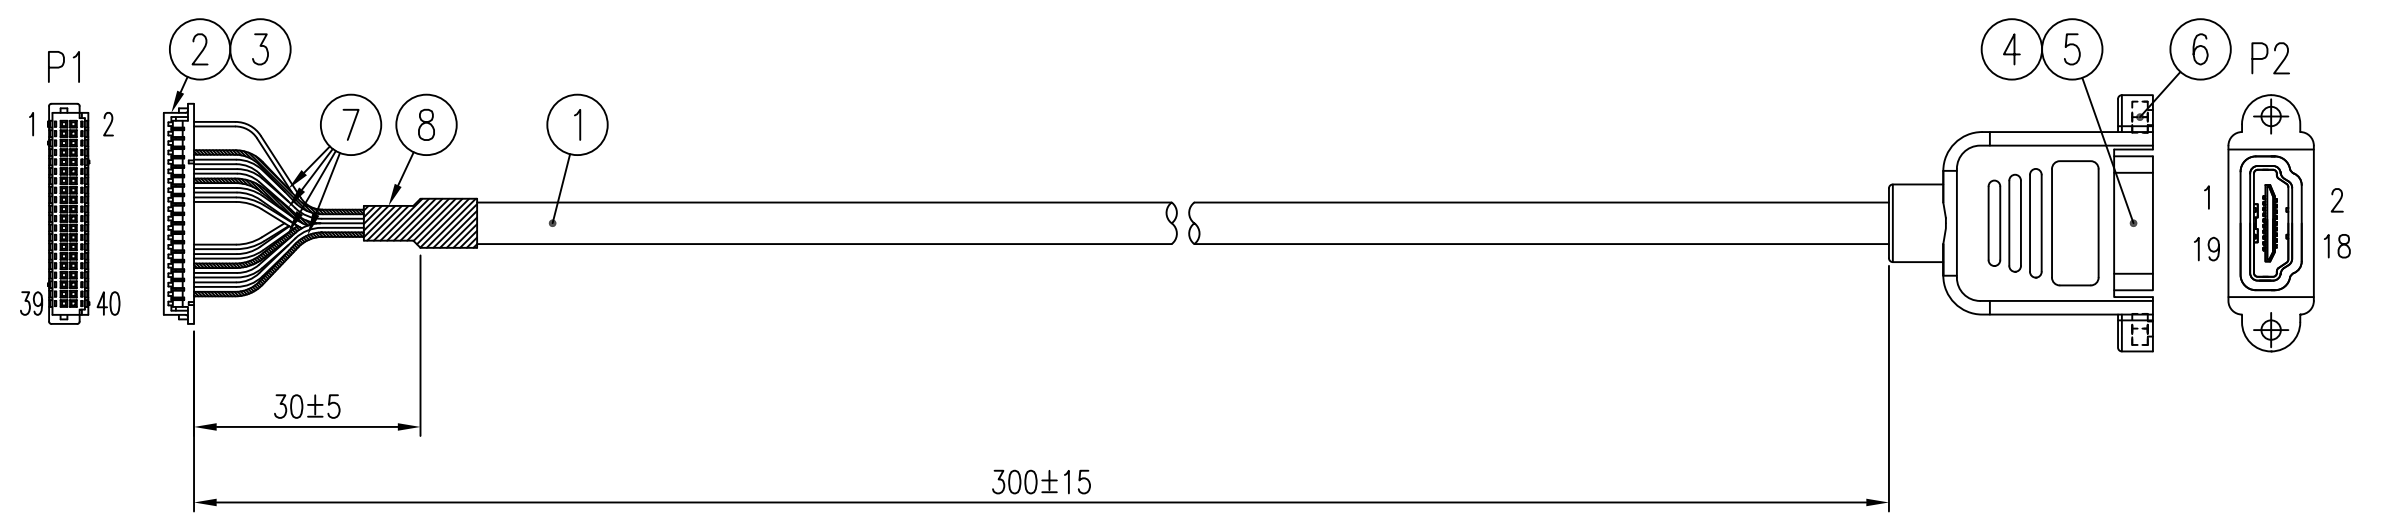

A

B

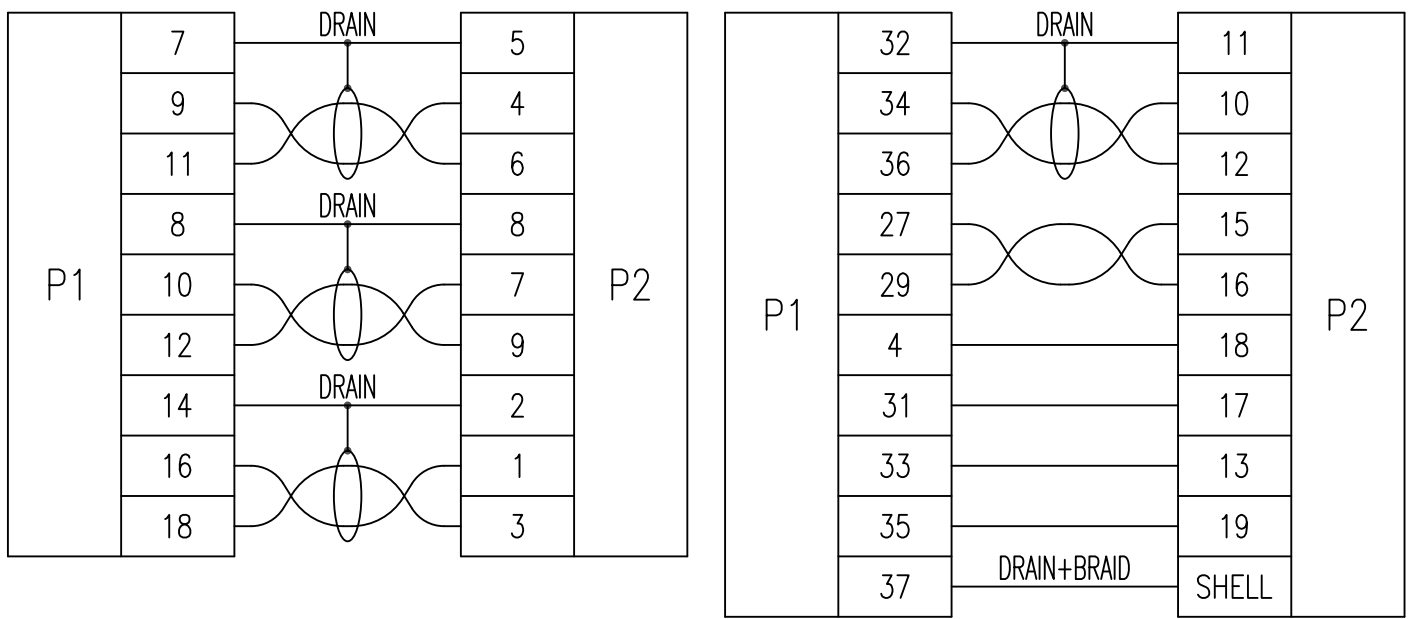

B

C

Electronics Test :
1. Hi-Pot Test : DC 300V/0.01S
2. Insulation Resistance : 2 M Ω (Min.)
3. Conductor Resistance : 3 Ω (Max.)
4. All cable open short and miss wire test : 100%

WIRING TABLE

8		HEAT SHRINKABLE TUBE, ϕ 6.0mm, L = 15.0mm, BLACK	1 PC
7		HEAT SHRINKABLE TUBE, ϕ 1.0mm, L = 30.0mm, BLACK	4 PCS
6	Drawing/SZ-QT	HEXAGON NUT, #4-40UNC	2 PCS
5		MOLD, PVC, BLACK (INNER WITH COPPER FOIL)	A/R
4	HMFXXXXXR04/Conitone	HDMI CONNECTOR, 19-POS., RECEPTACLE (PIN & SHELL GOLD FLASH)	1 PC
3	H13-P/E.C.I.	SOCKET CONTACT	19 PCS
2	H13H-2x20/E.C.I.	HOUSING, 40-POS., 1.25mm PITCH, BEIGE	1 PC
1	206186015000/Xinya	CABLE, (30 AWG x 1P + AD) x 4C + 30 AWG x 1P + 30 AWG x 5C + ADB, UL 20276, BLACK	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

C

D

DRAWN	Nicole Wang	3RD. ANGLE		MODEL NAME	 we move the world			
DESIGNED		SIZE / SCALE	A3 /	PART NAME				
APPROVED		SHEET	1 of 1	MATERIAL				
DATE	06/10/2014	UNIT	mm	TOLERANCE		PART NO.	7W9000000020	REV. A

D