

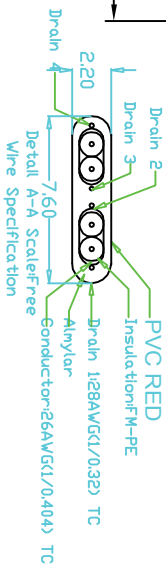
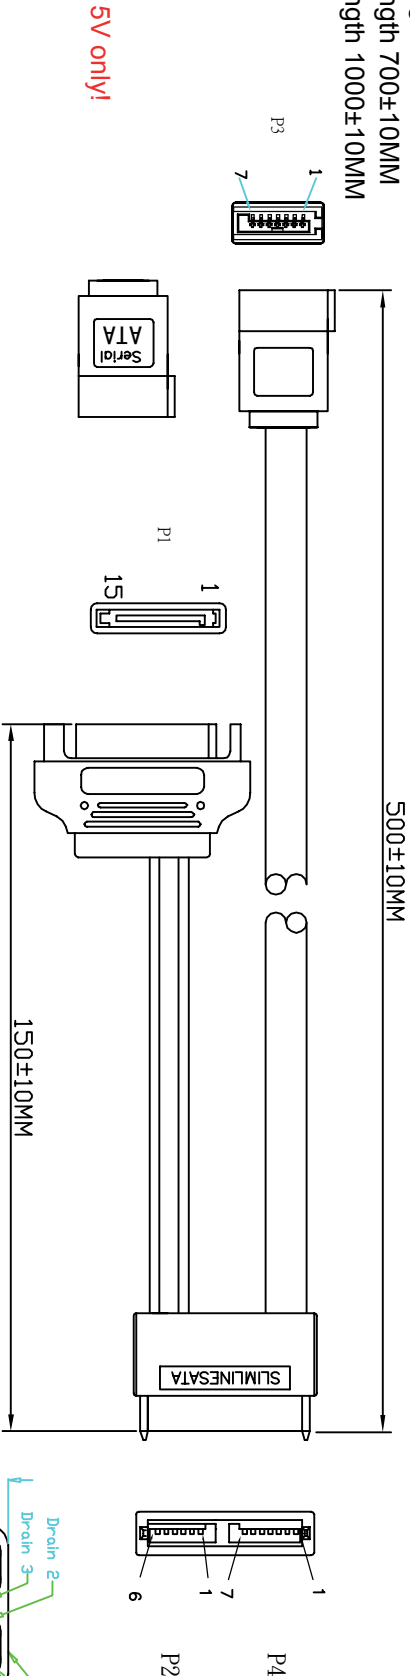
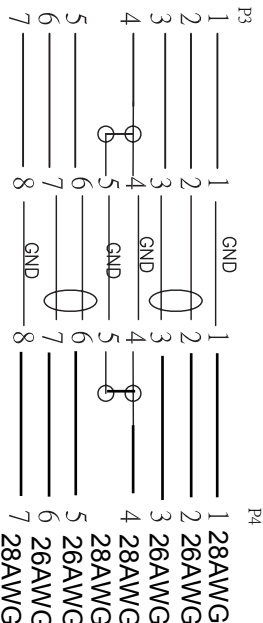


SATA Cable
Length 150±10MM
Length 300±10MM
Length 700±10MM
Length 1000±10MM

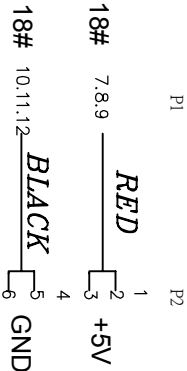

Test Conditions:
High Voltage Test: 300V Volt
Insulation Resistance: 10.0M ohm
Conduction Resistance: 5.0ohm
Features: Finished product to be done 100% of the electrical test, and without any open circuit/short circuit, mismatch and electrical flash



NO.	Description
A	SATA cable UL2725 26#(4/0.404TC+4/0.32TC)+AL OD:7.5*2.1MM RED
B	Power cable UL 1007 18#(34*0.12TC) red/black
P1	SATA power 15P connector terminal 1U"
P3	SATA 7P male terminal 1U"
P2/P4	Slimlin sata 7+6 connector

DLOCK® we move the world		
Title: Cable slim SATA female > SATA 7 pin + 2 pin power 70 cm		
Dat	2015 / 08 / 03	
Unit	mm	84791
Projection		Barcode
Rev	A	File No. 88031