

IDC (KRO)
Krone IDC


SCALE 1/4

Specification :

- Material :
- 1. Panel : SPCC, 1.2 mm thickness
 - 2. RJ45 Jack
 - 2-1. Housing : PBT+Glass Fiber, UL 94V-0.
 - 2-2. Contact Bracket : PBT+Glass Fiber, UL 94V-0.
 - 3. RJ45 Jack contact :
 - 3-1. Material : Phosphor Bronze with Nickel plated.
 - 3-2. Finish : Gold Flush plated on plug contact area.
 - 4. IDC :
 - 4-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 4-2. Terminal : Phosphor Bronze with Tin plated.
 - 5. PCB : CEM-1, UL 94V-0.

Performance :

- a. Insertion force : 20N max. (IEC 60603-7-4)
- b. Retention strength : 7.7kg between Jack and Plug.
- c. Operating temperature : -10°C to 60°C.(ISO/IEC 11801, ANSI/TIA 568 B.2)
- d. Life(mating cycles) :
 - * Jack : 750 cycles min.(ISO/IEC 11801, IEC 60603-7-4)
 - * IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with Krone punch down tool.

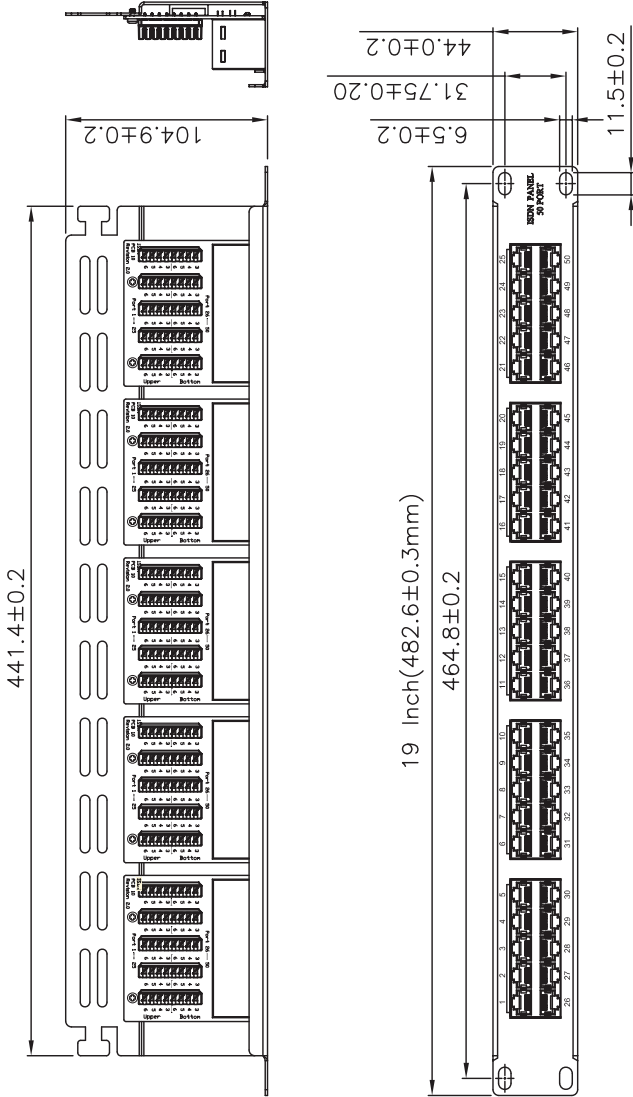

Date	2015 / 11 / 18		Title: Patch Panel ISDN 50 Port	
	Unit	mm	Item no.	43030
	Projection		Barcode	4043619430307
	Rev	A	File No.	