
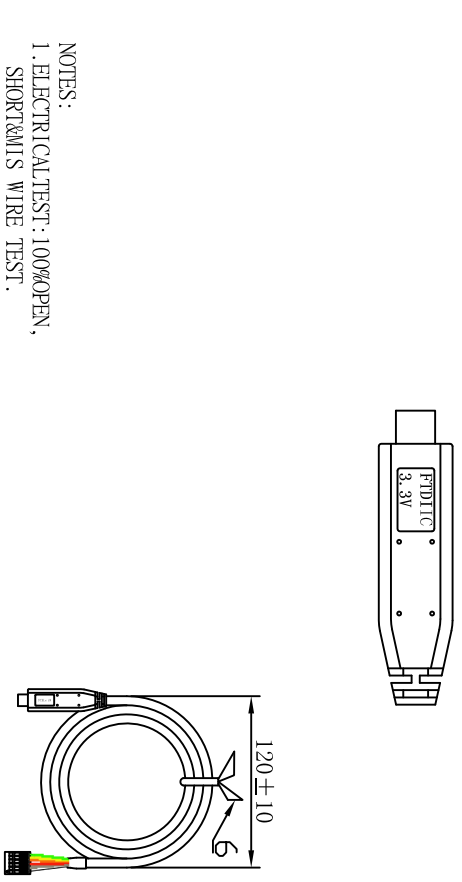


REV	ECRN	DATE
1	NEW PRODUCTION	20180630

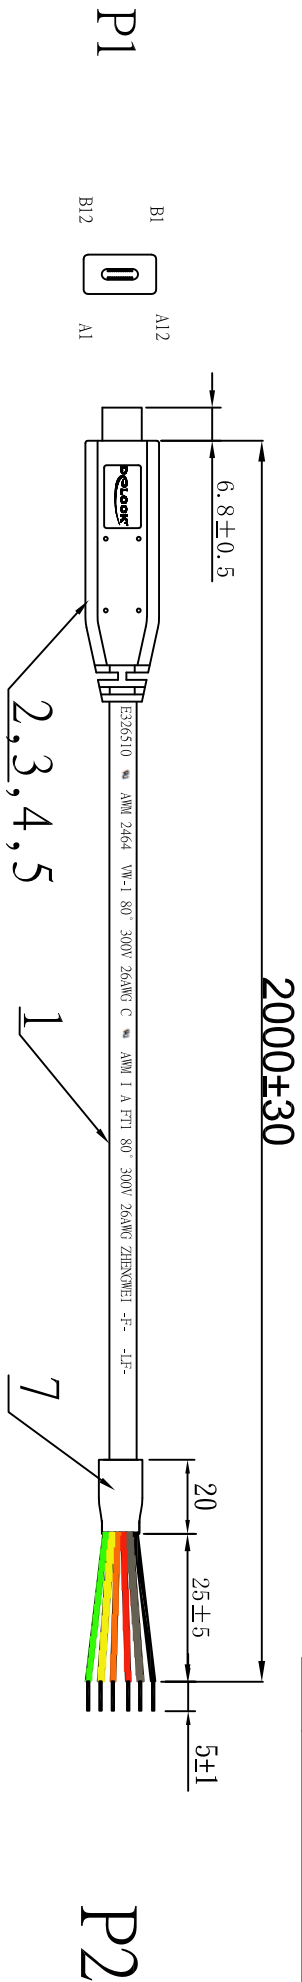

NOTES:
1. ELECTRICAL TEST: 100% OPEN,
SHORT & MIS WIRE TEST.
2. CONTACT RESISTANCE: 0.5ohm,
3. INSULATOR RESISTANCE: 5M ohm.
4. HIGH VOLTAGE: DC 300V 0.01sec.
5. MUST BE ROHS COMPLIANT.

⑧	I.180150.0301R	PE BAG	180*150*0.04MM PE BAG	1	PCS
⑦	F.0501B0.0100R	TUBE	Ø5.5*20mm HEAT TUBE COLOR BLACK	1	PCS
⑥	I.0000001.0400R	TIE	TIE BLACK L=70MM	1	PCS
⑤	C.045P01.0100R	MOLDING	PVC 45P BLACK	5.5	G
④	C.0000000.0000R	MOLDING	PE	2.5	G
③	J.0000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	3.5	G
②	B.01004M.0N05R	CONNECTOR	TTL-RS232-PCB(3.3V) TYPE C/M CONNECTOR PLASTIC:BLACK	1	PCS
①	A.009X01.0603R	CABLE	UL2464 26AWG(7/0.16TC)*6C(RED,ORANGE, GREEN, BLACK, YELLOW, BROWN)+AL FOIL PVC JACKET COLOR:BLACK OD=5.0±0.1mm L=2000MM	1	PCS
NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT

Packaging requirements
1. For each IPCS of wire binding according to the size of wire binding
PE bag & label packaging for customers:
2. Each case must be equipped with IPCS large waterproof bag:
3. The weight of each box must be within 10KG:
4. The actual number of containers shall prevail:
5. The quantity of each batch of containers shall be the same.

PIN WIRING	
P1	P2
1 RED(5V)	(VCC)
2 ORANGE	(TXD)
3 YELLOW	(RXD)
4 GREEN	(RTS#)
5 BLACK	(GND)
6 BROWN	(CTS#)

DLOCK® we move the world	
Title: Converter USB Type-C™ 2.0 male to LVTTL 6 open wires 2.0 m	
Date	2018 / 07 / 03
Unit	mm
Projection	A
Rev	
Item no.	63948
Barcode	4043619639489
File No.	88203