



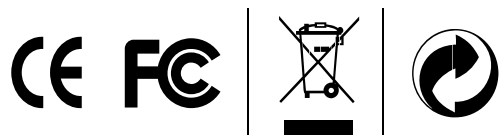

User manual

DELOCK[®]
we move the world

PCMCIA PCI Card, 1 x CardBus

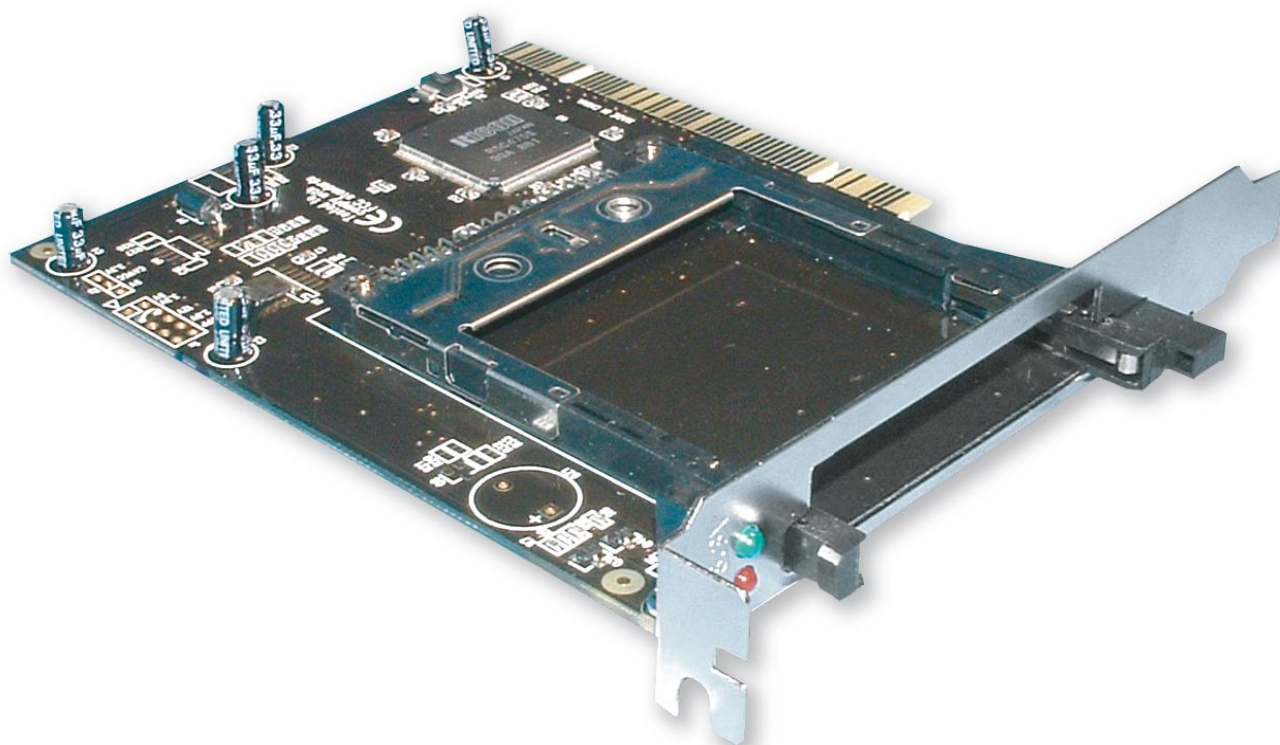

Product-No: 19601

User manual No: 19601-a

www.delock.de



Description

This PCMCIA PCI card gives you a PCMCIA slot on the back of your PC. The PCMCIA transfer rate is 16 bit (PC-Card) and 32 bit (Card Bus), supply voltage is 3.3V or 5V. The advantage of this PCMCIA PCI card is that you can use additional PC-Cards or card bus PCMCIA adapters like Wireless LAN, Bluetooth, USB adaptor, Firewire adapter, card reader, 10/100 LAN, etc. on your PC.

Specification

- Supports PCI local bus specifications 2.2
- Hot swap, plug and play
- PC card standard version 8.0 specification
- Supports 16 bit (PCMCIA 2.1/JEIDA 4.2) and 32 bit (CardBus)
- Supports 3.3V or 5V PCMCIA cards
- Supports type I/II/III PCMCIA cards
- for Windows 98SE/ME/2000/XP

System requirements

- PC with one free PCI Slot
- Windows 98SE/ME/2000/XP

Package content

- Delock PCMCIA PCI card, 1 x CardBus
- User manual

*Make sure that product package contains all items before operation. If any item is missing or damaged, then please contact your dealer immediately.

Hardware Installation

Note:

Follow the general instructions for installation of the card. If necessary, read the manual of your computer, or ask a specialist for help.

1. Turn off your PC, and unplug the power cord.
2. Open the housing.
3. Remove the slot holder from the available PCI slot.
4. Insert the card straight and carefully into the free PCI slot, until it is well seated.
5. Use a screw to attach the card to the housing.
6. Reattach the housing, and connect the power cord to the AC adapter.



Driver Installation

Windows 2000/XP

Restart the computer under Windows after installation of the hardware. Windows will detect the card and automatically set up the drivers. Afterwards, the PCI card and its properties are displayed under Control Panel / System / Device Manager.

Windows 98/98SE/ME

1. After installation and starting Windows the message "new hardware found" appears.
2. In hardware assistant, click "No", then "Next".
3. Click "No", then "Next", then "Finish".
4. The hardware assistant needs your Windows ME or 98 CD. Put the CD in the CD-ROM drive and click "OK".
5. Choose the option "CD ROM drive" and choose the path: Win98 or WinME and click "OK".
6. The driver will be located. Now your device is ready for use.

PCMCIA card installation in PCI card slot

1. Start your computer.
2. Insert the PCMCIA card into the PCI slot.
3. Push the PCMCIA card into the slot, until the eject button pops out.
4. Windows will detect the PCMCIA card automatically and may ask for the appropriate driver. For driver installation, please refer to the PCMCIA card documentation.

Removing a PCMCIA card from the PCI slot:

1. Move your mouse cursor to the removable drive symbol in the task bar.
2. Double-click the symbol.
3. Click "Remove", then click "OK".
4. Press the eject button at the PCI slot.
5. Pull the PCMCIA card out of the slot.



Support Delock

If you have further questions, please contact our customer support
support@delock.de / www.delock.de or phone
0700 - DELOCKGE (0700 - 335 625 43).

You can contact our service hotline during the following times:

Mon – Fri: 9:00 – 17:30 pm charge 0,12 € / min*

* A connection fee applies according to fee schedule of Deutsche Telekom AG or your local telephone provider.

All callers outside of Germany dial please 00493081789324

You can find current product information on our homepage: www.delock.de

Final clause

Information and data contained in this manual are subject to change without notice in advance. Errors and misprints excepted.

Copyright

No part of this user's manual may be reproduced, or transmitted for any purpose, regardless in which way or by which means, electronically or mechanically, without explicit written approval of Delock.