


Delock Antenna Cable N plug > RP-SMA plug CFD400 LLC400 10 m low loss

Description

This high-quality coaxial cable ensures a reliable connection of components of the radio frequency technology. It is characterised by a **very low attenuation**. Thanks to the **waterproof** N connector, this cable is ideal for outdoor use.

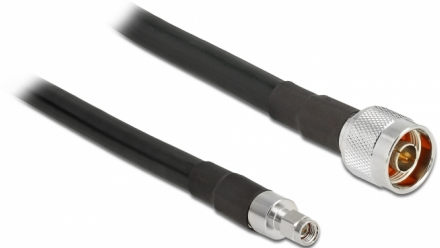

10 m

Item no. 13028

EAN: 4043619130283

Country of origin: Taiwan,
Republic of China

Package: Box

Technical details

- Connectors:
 - 1 x N plug waterproof >
 - 1 x RP-SMA plug
- Impedance: 50 Ohm
- Cable type: CFD400, LLC400
- Cable type: coaxial
- Cable attenuation:
 - 0.3 dB @ 3.0 GHz per meter
 - 0.48 dB @ 6.0 GHz per meter
- Cable diameter: ca. 10.5 mm
- Smallest bending radius: 51.5 mm
- Cable colour: black
- Length incl. connectors (L): ca. 10 m

System requirements

- Device with one free N and RP-SMA port

Package content

- Antenna cable

Images



Trid	SWR	f (U)	Ref(f)	Cal	SWR	f (U)	Ref(f)	Cal	SWR
1	1	1000000	1000	1	1	1000000	1000	1	1
2	1.000000	GHz	1.00E+03		2	1000000	GHz	1.00E+03	
3	1	1000000000	1000000	1	1	1000000000	1000000	1	1
4	1.000000	GHz	1.00E+09		2	1000000000	GHz	1.00E+09	
5	1	10000000000	10000000	1	1	10000000000	10000000	1	1
6	1.000000	GHz	1.00E+10		2	10000000000	GHz	1.00E+10	
7	1	100000000000	100000000	1	1	100000000000	100000000	1	1
8	1.000000	GHz	1.00E+11		2	100000000000	GHz	1.00E+11	
9	1	1000000000000	1000000000	1	1	1000000000000	1000000000	1	1
10	1.000000	GHz	1.00E+12		2	1000000000000	GHz	1.00E+12	
11	1	10000000000000	10000000000	1	1	10000000000000	10000000000	1	1
12	1.000000	GHz	1.00E+13		2	10000000000000	GHz	1.00E+13	
13	1	100000000000000	100000000000	1	1	100000000000000	100000000000	1	1
14	1.000000	GHz	1.00E+14		2	100000000000000	GHz	1.00E+14	
15	1	1000000000000000	1000000000000	1	1	1000000000000000	1000000000000	1	1
16	1.000000	GHz	1.00E+15		2	1000000000000000	GHz	1.00E+15	
17	1	10000000000000000	10000000000000	1	1	10000000000000000	10000000000000	1	1
18	1.000000	GHz	1.00E+16		2	10000000000000000	GHz	1.00E+16	
19	1	100000000000000000	100000000000000	1	1	100000000000000000	100000000000000	1	1
20	1.000000	GHz	1.00E+17		2	100000000000000000	GHz	1.00E+17	
21	1	1000000000000000000	1000000000000000	1	1	1000000000000000000	1000000000000000	1	1
22	1.000000	GHz	1.00E+18		2	1000000000000000000	GHz	1.00E+18	
23	1	10000000000000000000	10000000000000000	1	1	10000000000000000000	10000000000000000	1	1
24	1.000000	GHz	1.00E+19		2	10000000000000000000	GHz	1.00E+19	
25	1	100000000000000000000	100000000000000000	1	1	100000000000000000000	100000000000000000	1	1
26	1.000000	GHz	1.00E+20		2	100000000000000000000	GHz	1.00E+20	
27	1	1000000000000000000000	10000000000000000000	1	1	1000000000000000000000	10000000000000000000	1	1
28	1.000000	GHz	1.00E+21		2	1000000000000000000000	GHz	1.00E+21	
29	1	10000000000000000000000	100000000000000000000	1	1	10000000000000000000000	100000000000000000000	1	1
30	1.000000	GHz	1.00E+22		2	10000000000000000000000	GHz	1.00E+22	
31	1	100000000000000000000000	10000000000000000000000	1	1	100000000000000000000000	10000000000000000000000	1	1
32	1.000000	GHz	1.00E+23		2	100000000000000000000000	GHz	1.00E+23	
33	1	1000000000000000000000000	100000000000000000000000	1	1	1000000000000000000000000	100000000000000000000000	1	1
34	1.000000	GHz	1.00E+24		2	1000000000000000000000000	GHz	1.00E+24	
35	1	10000000000000000000000000	10000000000000000000000000	1	1	10000000000000000000000000	10000000000000000000000000	1	1
36	1.000000	GHz	1.00E+25		2	10000000000000000000000000	GHz	1.00E+25	
37	1	100000000000000000000000000	100000000000000000000000000	1	1	100000000000000000000000000	100000000000000000000000000	1	1
38	1.000000	GHz	1.00E+26		2	100000000000000000000000000	GHz	1.00E+26	
39	1	1000000000000000000000000000	1000000000000000000000000000	1	1	1000000000000000000000000000	1000000000000000000000000000	1	1
40	1.000000	GHz	1.00E+27		2	1000000000000000000000000000	GHz	1.00E+27	
41	1	10000000000000000000000000000	10000000000000000000000000000	1	1	10000000000000000000000000000	10000000000000000000000000000	1	1
42	1.000000	GHz	1.00E+28		2	10000000000000000000000000000	GHz	1.00E+28	
43	1	100000000000000000000000000000	100000000000000000000000000000	1	1	100000000000000000000000000000	100000000000000000000000000000	1	1
44	1.000000	GHz	1.00E+29		2	100000000000000000000000000000	GHz	1.00E+29	
45	1	1000000000000000000000000000000	1000000000000000000000000000000	1	1	1000000000000000000000000000000	1000000000000000000000000000000	1	1
46	1.000000	GHz	1.00E+30		2	1000000000000000000000000000000	GHz	1.00E+30	
47	1	10000000000000000000000000000000	10000000000000000000000000000000	1	1	10000000000000000000000000000000	10000000000000000000000000000000	1	1
48	1.000000	GHz	1.00E+31		2	10000000000000000000000000000000	GHz	1.00E+31	
49	1	100000000000000000000000000000000	100000000000000000000000000000000	1	1	100000000000000000000000000000000	100000000000000000000000000000000	1	1
50	1.000000	GHz	1.00E+32		2	100000000000000000000000000000000	GHz	1.00E+32	

Interface

Connector 1:	1 x RP-SMA plug
Connector 2:	1 x N male

Technical characteristics

Impedance:	50 Ω
------------	------

Physical characteristics

Cable type:	CFD400, LLC400
Cable attenuation:	0.30 dB @ 3.0 GHz 0.48 dB @ 6.0 GHz
Cable colour:	black
Cable length:	10 m
Smallest bending radius:	51.5 mm