


# Delock USB 5 Gbps Adapter Type-E Key A Pin Header female to internal Key A female

## Description

This adapter by Delock converts the internal USB pin header male into the internal **USB key A female**. Various cables can be connected to the adapter, to provide either one USB Type-C™ or two USB Type-A interface.

### Active adapter

Due to the **built-in chipset**, USB Type-C™ functions such as channel configuration (CC1 and CC2) can be used.

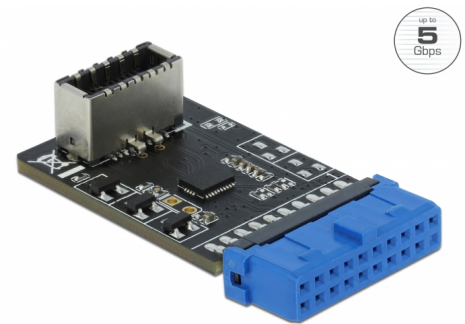

**Item no. 41981**

EAN: 4043619419814

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x 19 pin SuperSpeed USB (USB 3.2 Gen 1) pin header female
  - 1 x SuperSpeed USB (USB 3.2 Gen 1) key A 20 pin female
- Data transfer rate up to 5 Gbps
- Electrical power: max. 4.5 watt (5 V / 900 mA)
- Dimensions (LxWxH): ca. 40 x 22 x 11 mm


## System requirements

- Linux Kernel 3.3 or above
- Windows 8.1/8.1-64/10/10-64
- Motherboard with a free 19 pin USB 3.0 pin header male

## Package content

- Adapter

## Images



## General

Specification:	USB 5 Gbps
Supported operating system:	Linux Kernel 3.3 or above Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

## Interface

Connector 1:	1 x 20 pin USB 5 Gbps pin header female
Connector 2:	1 x USB 5 Gbps key A 20 pin female

## Technical characteristics

Chipset:	Etron EJ179V
Data transfer rate:	USB 5 Gbps up to 5 Gb/s

## Physical characteristics

Length:	40 mm
Width:	22 mm
Height:	11 mm