


# Delock 2.5" Converter U.2 SFF-8639 > M.2 NVMe Key M - 7 mm

## Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260 and 2242 format. The converter can be installed into your system internally through the U.2 68 pin interface.

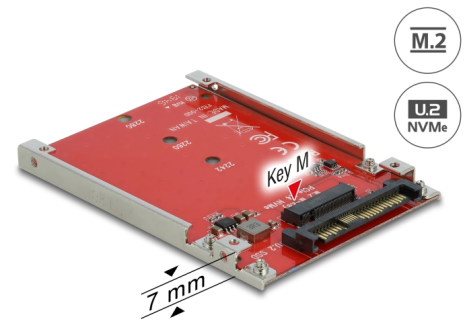

**Item no. 62725**

EAN: 4043619627257

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x U.2 SFF-8639 male >
  - 1 x 67 pin M.2 key M slot
- Interface: PCIe x4 Rev. 4.0
- Supports M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Maximum output power: 16.5 Watt (3.3 V / 5 A)
- Dimensions (LxWxH): ca. 100 x 70 x 7 mm
- OS independent, no driver installation necessary

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- A free U.2 SFF-8639 interface or

- A free SFF-8643 interface


---

## Package content

- Converter
- 2.5" frame
- 1 x fixing screw for M.2 module
- 4 x screws for frame
- User manual

---

## Images

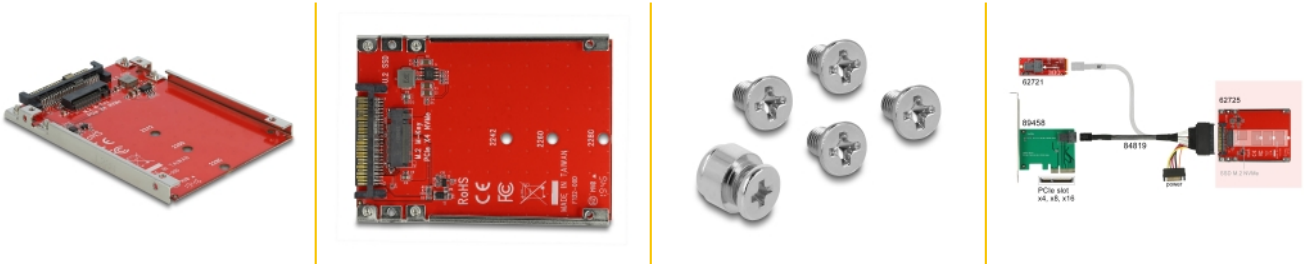

## General

Form factor:	2.5"
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	power and activity
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

## Interface

Connector 1:	1 x M.2 based on PCIe
Connector 2:	1 x U.2 SFF-8639 male

## Physical characteristics

Length:	100 mm
Width:	70 mm
Height:	7 mm