

# Delock Adapter U.2 SFF-8639 > PCIe x4 with fixing plate

## Description

This adapter by Delock can be connected via U.2 interface to the system and provides a PCI Express x4 NVMe slot. To this slot can be connected e.g. PCI Express cards with M.2 slot for M.2 PCIe modules.



**Item no. 62863**

EAN: 4043619628636

Country of origin: Taiwan,  
Republic of China

Package: White Box

## Technical details

- Connectors:
  - 1 x U.2 SFF-8639 male >
  - 1 x PCI Express x4, V3.0
- Bootable, ex UEFI version 2.3.1
- Supports NVM Express (NVMe)
- Maximum output current: 4 A
- Output voltage: 3.3 V
- Short circuit protection, over heating protection
- ESD protection up to 2 kV
- Dimensions (LxWxH):
  - adapter: ca. 85 x 45 x 15 mm
  - fixing plate: ca. 95 x 70 x 10 mm

## System requirements

- Linux Kernel 3.20 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64

- A free U.2 SFF-8639 interface


---

## Package content

- Adapter
- Fixing plate
- Screws and spacer
- User manual

---

## Images

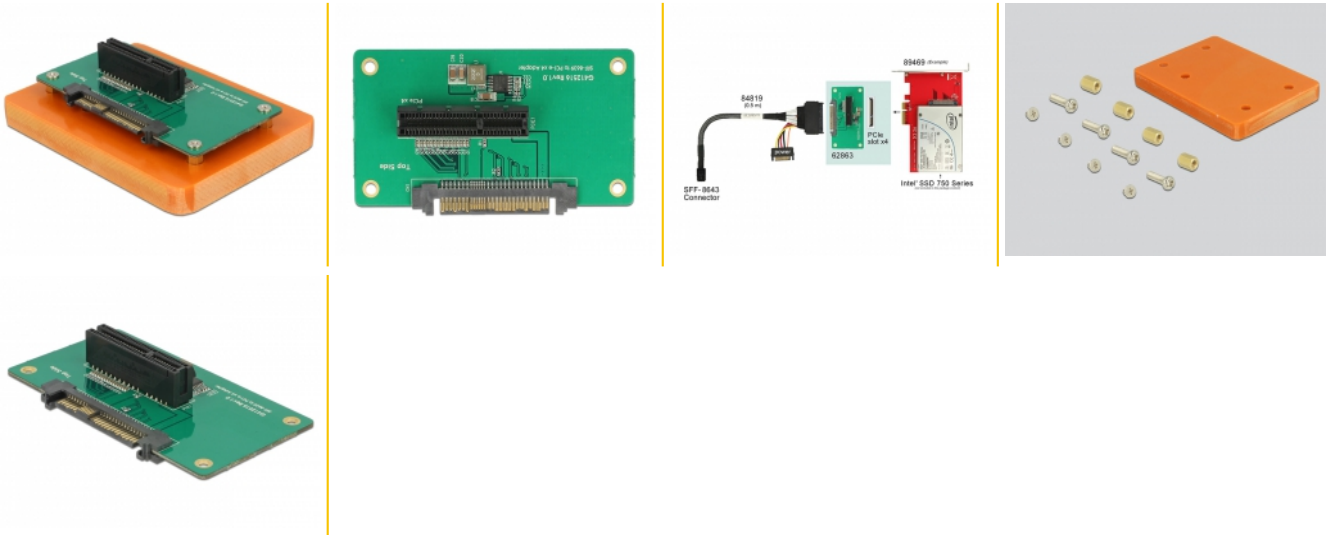

## General

Function:	NVM Express (NVMe) Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 3.2 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Protection:	ESD (Electrostatic Discharge) Short circuit protection Overheating protection

## Interface

Connector 1:	1 x U.2 SFF-8639 male
Connector 2:	1 x PCI Express x4, V3.0

## Technical characteristics

Voltage:	3.3 V output current
----------	----------------------