


Delock Converter M.2 Key M male > 2 x Serial RS-422 / 485 male

Description

This converter by Delock expands the system by two serial RS-422 / 485 ports. The RS-422 / 485 ports can be attached to a housing or slot bracket.

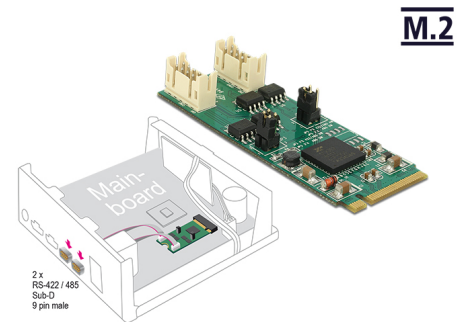

Item no. 62948

EAN: 4043619629480

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Connectors:
 - 1 x 67 pin M.2 key M male >
 - 2 x 10 pin pin header
 - 2 x serial RS-422 / 485 D-Sub 9 pin male with nuts on cable
- Chipset: Exar 17V352
- Interface: PCIe
- Form factor: M.2 2260
- Suitable for M.2 slot with key M based on PCIe
- 2 x jumper for mode setting
- Compatible with 16C550 UART
- ±15 kV ESD protection for all serial signals
- Data transfer rate up to 921.6 Kbps
- Operating temperature: -30 °C ~ 75 °C
- Storage temperature: -40 °C ~ 85 °C
- Relative humidity: 5 - 95 % (not condensing)
- Dimensions (LxWxH): ca. 60 x 22 x 8 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64
- One free M.2 key M slot

Package content

- Converter
- 2 x RS-422 / 485 connection cable, length ca. 30 cm
- Driver CD
- User manual

Images



General

Form factor:	M.2 2260
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe

Interface

Connector 1:	1 x 67 pin M.2 Key M male
Connector 2:	2 x 10 pin pin header
connector 3:	2 x serial RS-422 / 485 Sub-D 9 pin male with nuts on cable

Technical characteristics

Chipset:	Exar 17V352
Data transfer rate:	up to 921.6 Kbps
Storage temperature:	-40 °C ~ 85 °C
Operating temperature:	-30 °C ~ 75 °C
Humidity:	5 ~ 95 %

Physical characteristics

Length:	60 mm
Width:	22 mm
Height:	8 mm