

# Delock Adapter USB 2.0 Tipa-A na 1 x serijski RS-422/485 muški sa 6 pinskim priključnim blokom 5 V 1,8 m

## Opis


Ovaj USB 2.0 na serijski adapter tvrtke Delock omogućava standardni RS-422 i RS-485 spoj za mjerne uređaje, POS sustave, pisače, modeme, IoT uređaje, itd.

## Priključni blok

Priključni blok prikladan je za ugradnju u kućišta osobnog računala i za bilo koje nelemljene kabelaške spojeve s RS-422 ili RS-485 sučeljem.

## Električno napajanje

Opcionalno se vanjski uređaji mogu napajati naponom od 5 V preko priključnog bloka.

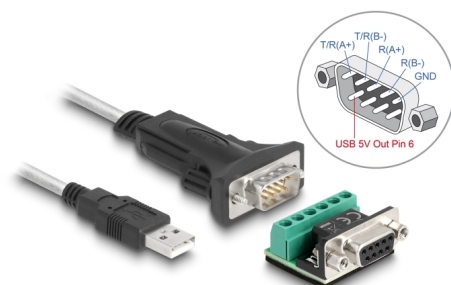

1,8 m

## Predmet br. 63465

EAN: 4043619634651

Zemlja podrijetla: China

Pakiranje: Retail Box

## Tehnički podaci

- Priključak:
  - Adapter:
    - 1 x USB 2.0 Tipa-A muški
    - 1 x serijski RS-422/485 D-Sub 9 zatični muški s vijcima
  - Blok priključaka:
    - 1 x serijski RS-422/485 D-Sub 9 zatični ženski s maticama
    - 1 x 6-polni blok priključaka
- Priključni blok: T/R, T/R-, RXD, RXD-, GND, VCC
- Skup čipova: FTDI FT232R
- Brzina prijenosa podataka do 921,6 Kbps
- RS-422/485 završni otpornik: 120 Ω
- Duljina kabela zajedno s priključkom: oko 1,8 m



## Preduvjeti sustava

- Linux Kernel 5.11 ili noviji
- Mac OS 11.6 ili noviji
- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2019
- Osobno ili prijenosno računalo sa slobodnim USB Tipa-A priključkom

## Sadržaj pakiranja

- USB 2.0 na 1 x serijski RS-422/485 adapter
- Adapter bloka priključaka
- CD s upravljačkim programom
- Korisnički priručnik

## Slike



PIN	DB9 Buchse/Male		TerminalBlock/Terminal Block
	RS-422	RS-485	
1	Transmit (A+)	T/R (A+)	T/R (A+)
2	Transmit (B-)	T/R (B-)	T/R (B-)
3	Receiver (A+)	NC	Receiver (A+)
4	Receiver (B-)	NC	Receiver (B-)
5	Signal GND (S0)	Signal GND (S0)	Signal GND (S0)
6	USB 5 V	USB 5 V	USB 5 V
7	NC	NC	NC
8	NC	NC	NC
9	NC	NC	NC

## General

Funkcija:	Plug & Play
Tehnički podaci:	RS-422 / RS-485 (EIA / TIA) USB 2.0
Supported operating system:	Linux Kernel 2.6 ili noviji Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2012 R2 Windows Server 2016 Windows Server 2019 Mac OS 11.1 or above Windows 11
Protection:	ESD (Electrostatic Discharge)

## Interface

Priključak 1:	1 x USB Tipa-A muški
Priključak 2:	1 x Serial RS-422/485 DB9 male
priključak 3:	1 x 6-polni blok priključaka

## Technical characteristics

Skup čipova:	FTDI FT232RL
Brzina prijenosa podataka:	up to 921.6 Kbps
FIFO:	1 x 128 byte receive 1 x 256 byte transmit
Signal transmission:	T/R+, T/R-, RXD+, RXD-, GND, VCC
Data transmission:	Poludupleks full duplex asynchronous Bi-directional differential
Napon:	5 V output voltage

UART:	USB to serial UART
Otpornik:	Termination resistors 120 Ω
Support:	Modbus

### Physical characteristics

Kućište boja:	crne
Boja kabela:	transparentna
Cable length incl. connector:	180 cm
Vrsta vijka:	#4-40 UNC
Shielding:	double