


Delock U.2 to M.3 / NF1 Converter

Description

This converter by Delock enables the connection of an M.3 / NF1 (NGSFF) SSD. One M.3 module with 110 mm length and 30 mm width can be connected. The converter can be installed into your system internally through the U.2 68 pin interface.

Cooling for the SSD

For better cooling, the PCB of the converter has a recess, which is located directly under the inserted SSD. Thus it is possible that an optional heat sink can be mounted on the bottom of the SSD.

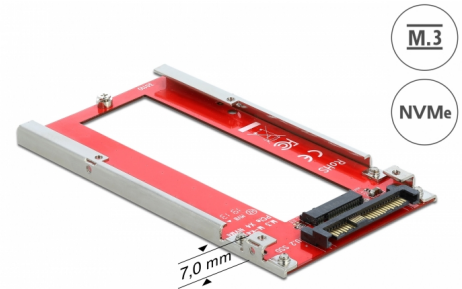

Item no. 64077

EAN: 4043619640775

Country of origin: Taiwan,
Republic of China

Package: White Box

Technical details

- Connectors:
 - 1 x U.2 SFF-8639 male >
 - 1 x M.3 / NF1 slot
- Interface: PCIe / NVMe
- Supports M.3 / NF1 modules in format 30110
- Supports M.3 / NF1 SSD up to 4.8 mm thickness
- Supports NVM Express (NVMe)
- Data transfer rate up to 32 Gbps
- Bootable, ex UEFI version 2.3.1
- Dimensions (LxWxH): ca. 130 x 70 x 7 mm

System requirements

- Linux Kernel 4.6.4 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- A free U.2 SFF-8639 interface

Package content

- Converter
- Mounting material
- User manual

Images



General

Function:	Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 4.6.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

Interface

Connector 1:	1 x 68 pin U.2 SFF-8639 male
Connector 2:	1 x M.3 / NF1 slot

Physical characteristics

Length:	130 mm
Width:	70 mm
Height:	7 mm