


Delock SATA 22 pin male to M.2 Key B slot Adapter

Description

This adapter by Delock enables the connection of an **M.2 SSD** in 2280, 2260, 2242 and 2230 format. The adapter will be installed into the system internally through a SATA 22 pin interface.

Perfect accessory

This item is suitable as an accessory for the Delock docking and clone station 64098. Thus, M.2 SATA SSDs can be used and cloned.

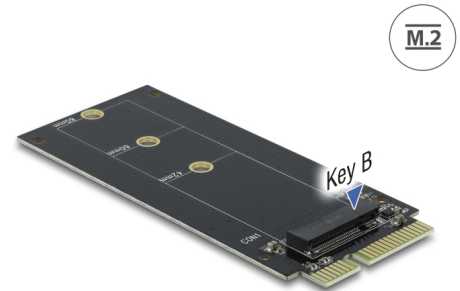

Item no. 64099

EAN: 4043619640997

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x SATA 22 pin plug
 - 1 x 67 pin M.2 key B slot
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable
- 1 x LED indicator
- Data transfer rate up to 6 Gb/s
- Dimensions (LxWxH): ca. 97 x 45 x 4 mm


System requirements

- A free SATA 22 pin interface

Package content

- Adapter
- Mounting material
- Screwdriver

Images

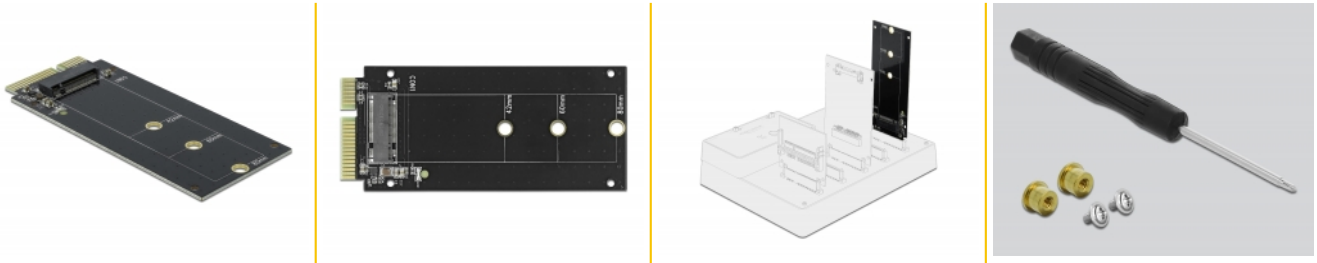

General

Function:	bootable
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x SATA 6 Gb/s 22 pin plug
Connector 2:	1 x 67 pin M.2 key B slot

Physical characteristics

Length:	97 mm
Width:	45 mm
Height:	4 mm