


# Delock Adapter Raspberry Pi GPIO Pin Header > Serial RS-232

## Description

This adapter by Delock enables the connection of a serial device to the GPIO interface of the Raspberry Pi via a 4 pin pin header (RX and TX), by using the included cable. The system can be configured according to the requirement.

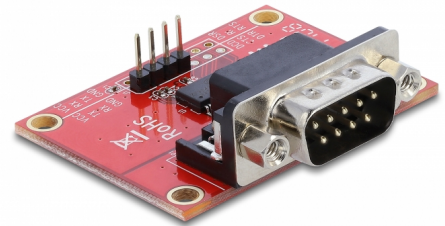

**Item no. 65628**

EAN: 4043619656288

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connectors:
  - 1 x serial RS-232 DB9 male
  - 1 x 4 pin pin header
- Data transfer rate up to 230.4 Kb/s
- Level shifter from RS-232 3.3 V to 5 V on Raspberry Pi
- Supported input voltage: 2.7 V ~ 5.25 V
- Dimensions (LxWxH): ca. 48 x 43 x 16 mm
- OS independent, no driver installation necessary

## System requirements

- A free pin header connector

## Package content

- Adapter
- Cable pin header

## Images

