

Delock DIP sliding switch 7-digit 2.54 mm pitch THT vertical red 5 pieces

Description


This DIP sliding switch by Delock is suitable for the through-hole mounting on a PCB.

THT Assembly Technology

The attached soldering pins on the DIP switch can be inserted through contact holes on a PCB and soldered from the bottom side. The switching rows are used to set configurations and to change parameters.

Multifunctional application

The DIP switch is mainly used in telecommunications, computers and measuring.

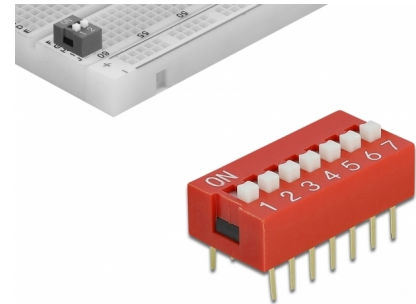

5 x

Item no. 66357

EAN: 4043619663576

Country of origin: China

Package: Tube



Technical details

- Connectors:
2 x 7 soldering pin
- Number of positions: 7
- Pitch: 2.54 mm
- Switch position: on / off
- Switching rating: 25 mA, 24 VDC
- Insulation resistance: 100 MΩ / 500 VDC
- Withstanding voltage: 300 VAC / 1 minute
- Soldering temperature: 250 °C for ca. 3 - 5 seconds
- Mechanical life: 2000 cycles
- Environmental temperature: -40 °C ~ 85 °C
- Operating temperature: -40 °C ~ 85 °C
- Material: plastic
- Colour: red
- Dimensions (LxWxH): ca. 19.2 x 9.9 x 5.5 mm

Package content

- 5 x DIP sliding switch

Images



General

Mounting type:	Soldering
----------------	-----------

Interface

connector:	2 x 3 soldering pin 2 x 7 soldering pin
------------	--

Technical characteristics

Storage temperature:	-40 °C ~ 85 °C
Operating temperature:	-40 °C ~ 85 °C
Resistor:	100 MΩ / 500 VDC

Physical characteristics

Pitch distance:	2.54 mm
Material:	Plastic
Length:	9.9 mm 19.2 mm
Width:	9.9 mm 9.0 mm
Height:	5.5 mm
Switch:	On / Off
Colour:	red