


# Delock D-Sub 15 male with insulation displacement 2 pieces

## Description

This D-Sub 15 male with insulation displacement by Delock can be used to mount flat cables with 15 pin and a pitch of 1.27 mm. The D-Sub connectors for flat cables are often used e.g. in industry, telecommunications and for hobby applications.

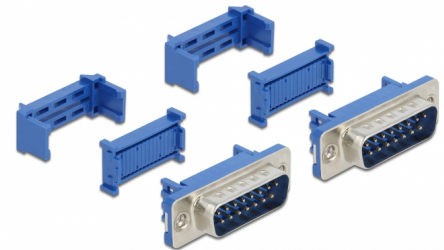

## Note

For pressing the flat cable into the insulation displacement, it is recommended to use the Delock installation tool 86469.

**Item no. 66592**

EAN: 4043619665921

Country of origin: China

Package: Zip poly bag

## Technical details

- Connectors:
  - 1 x D-Sub 15 male (2 rows) with nuts with insulation displacement
  - 1 x press-in clip
  - 1 x strain relief clip
- Suitable for flat cable with 1.27 mm pitch
- Operating temperature: -40 °C ~ 105 °C
- Colour: blue
- Dimensions (LxWxH): ca. 39.1 x 17.5 x 12.8 mm

## System requirements

- A free D-Sub 15 pin female and flat cable 15 pin with 1.27 mm pitch

## Package content

- 2 x D-Sub 15 male with insulation displacement



### Interface

Connector 1:	1 x press-in clip 1 x Sub-D15 male (2 rows) with nuts with insulation displacement 1 x strain relief clip
--------------	-----------------------------------------------------------------------------------------------------------------

### Technical characteristics

Operating temperature:	-40 °C ~ 105 °C
------------------------	-----------------

### Physical characteristics

Pitch distance:	1.27 mm
Length:	39.1 mm
Width:	17.5 mm
Height:	12.8 mm
Colour:	blue