


Delock RJ45 2 x female to 2 x Terminal Block with push-button for DIN rail angled

Description

This adapter by Delock can be used to connect various network devices. Strands with stripped ends can be connected via the terminal block toolfree.

DIN rail mounting

With the clips included in the delivery content, the adapter can be attached to a 15 mm or 35 mm wide DIN rail.

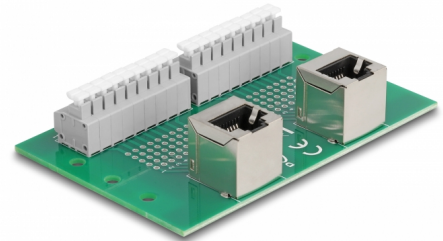

Item no. 66995

EAN: 4043619669950

Country of origin: China

Package: Box

Technical details

- Connectors:
 - 2 x RJ45 female angled
 - 2 x 9 pin terminal block
- Pin assignment: 1:1
- Pitch: 3.81 mm
- Useable for a cable gauge from 24 to 12 AWG
- DIN rail mounting: 15 mm and 35 mm
- Operating temperature: -40 °C ~ 100 °C
- Dimensions (LxWxH): ca. 91 x 60 x 18 mm



System requirements

- Two free RJ45 male
- 15 mm or 35 mm DIN rail

Package content

- Adapter
- 2 x DIN rail clip
- 5 x screws

Images



General

Mounting type:	DIN rail mounting: 15 mm and 35 mm
----------------	------------------------------------

Interface

Connector 1:	2 x RJ45 female angled
Connector 2:	2 x 9 pin terminal block

Technical characteristics

Operating temperature:	-40 °C ~ 100 °C
------------------------	-----------------

Physical characteristics

Pitch distance:	3.81 mm
Conductor gauge:	24 to 12 AWG
Length:	91 mm
Width:	60 mm
Height:	18 mm