


Delock Optical Fiber Cable CS male to LC Duplex singlemode G657A2 / OS2 Uniboot 0.5 m

Description

This optical cable by Delock can be used to connect transceivers with CS interface and for cabling the optical fiber network in data centres.

CS connector

The CS (Connector Senko) plug belongs to the Very Small Form Factor (VSFF) connectors and has a smaller form factor than comparable LC Duplex connectors. The plug is particularly suitable for applications with high packing density. The push-pull tab on the connector makes it easy to plug and unplug.

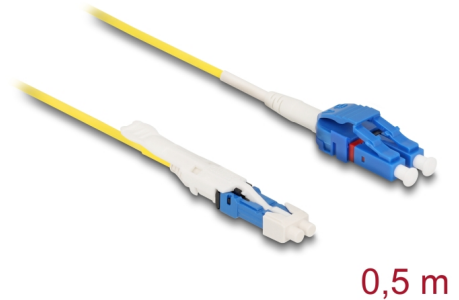

0,5 m

Item no. 88291

EAN: 4043619882915

Country of origin: China

Package: Zip poly bag

Technical details

- Connectors:
 - 1 x CS plug
 - 1 x LC Duplex
- Singlemode G657A2 / OS2 cable
- Fibre: 9/125 µm
- Zirconia ceramic ferrule with protection cap
- Uniboot connector
- Polarity A/B can be changed without tools
- Push pull tab
- Cable diameter: ca. 2 mm
- Insertion loss < 0.2 dB
- Return loss > 55 dB
- Operating temperature: -20 °C ~ 70 °C
- LSZH (halogen-free)
- Colour: yellow
- Length incl. connectors: ca. 0.5 m

Package content

- Optical fiber cable

Images



Interface

Connector 1:	1 x CS plug
Connector 2:	1 x LC Duplex

Technical characteristics

Operating temperature:	-20 °C ~ 70 °C
------------------------	----------------

Physical characteristics

Material:	LSZH (halogen-free)
Length:	0.5 m
Colour:	yellow
Cable diameter:	2 mm