

# Delock WLAN 802.11 ac/a/h/b/g/n Antenna RP-SMA plug 3 dBi omnidirectional with tilt joint black

## Description

This Wireless LAN antenna can be connected to a WLAN device with RP-SMA interface, in order to send and receive signals.

Bluetooth



**Item no. 88461**

EAN: 4043619884612

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connector: RP-SMA plug
- Frequency range:
  - 2.400 - 2.500 GHz
  - 5.150 - 5.875 GHz
- Antenna gain: 3 dBi
- Impedance: 50 Ohm
- Polarisation: linear, vertical
- VSWR: 2.0
- Operating temperature: -10 °C ~ 55 °C
- Housing material: ABS
- Colour: black
- Length:
  - ca. 158.40 mm (with tilt joint)
  - ca. 125.90 mm (without tilt joint)
- Diameter:
  - ca. 7.40 mm (top)
  - ca. 13.15 mm (RP-SMA)


## System requirements

- Device with a free RP-SMA jack

## Package content

- WLAN antenna

## Images

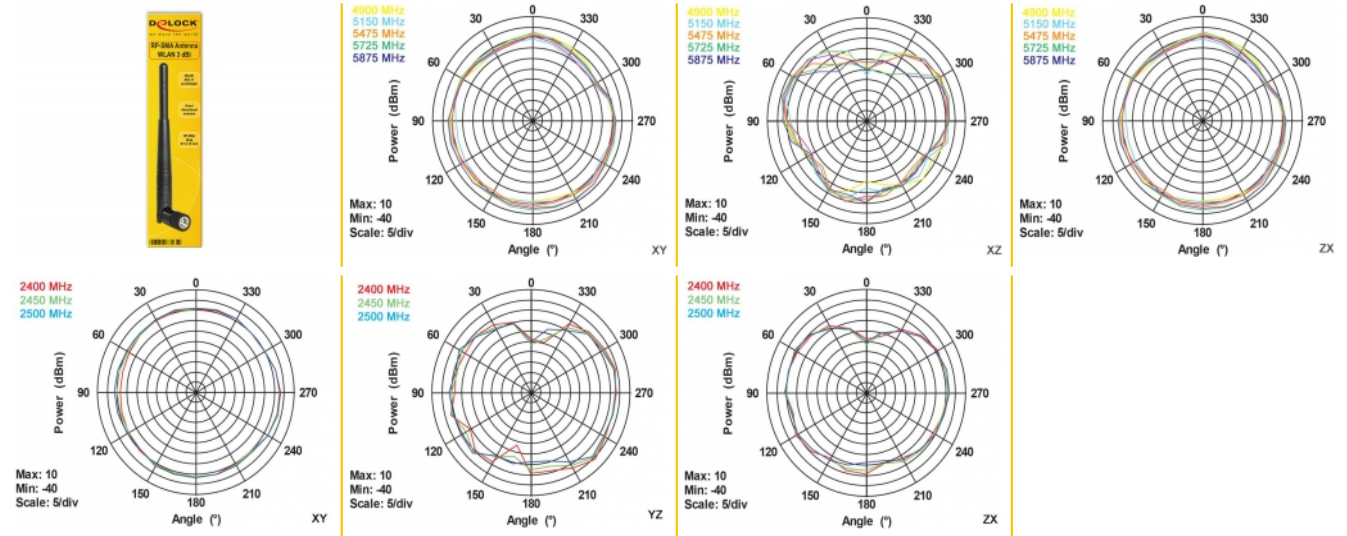

## Interface

connector:	RP-SMA plug
------------	-------------

## Technical characteristics

Frequency range:	2.400 - 2.500 GHz 5.150 - 5.875 GHz
Gain:	3 dBi
Impedance:	50 Ω
Operating temperature:	-10 °C ~ 55 °C
Polarisation:	linear vertical
VSWR:	2.0

## Physical characteristics

Housing material:	ABS
Diameter:	7.40 mm
Diameter connector:	13.15 mm
Length with tilt joint:	158.40 mm
Length without tilt joint:	125.90 mm
Colour:	black