


# Delock PCI Express x1 Card to 1 x Serial + 1 x Parallel

## Description

The Delock PCI Express card expands a PC by one external serial port and one external parallel port. Different devices such as scanner, printer, mouse etc. can be connected to this card.

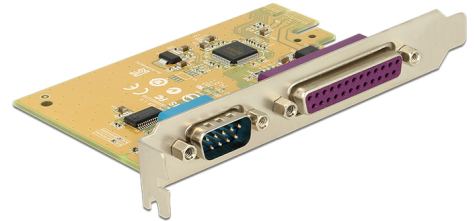

**Item no. 89446**

EAN: 4043619894468

Country of origin: China

Package: Retail Box

## Special features

- This PCIe card 1 x Serial + 1 x Parallel is Windows Server 2019 WHQL certified

## Technical details

- Connector:
  - external:
    - 1 x serial RS-232 DB9 male
    - 1 x Parallel DB25 female
  - internal:
    - 1 x PCI Express x1, V2.0
- Chipset: SUN2410
- **Serial specification:**
  - Data transfer rate up to 115.2 Kb/s
  - FIFO: 128 byte
  - Compatible with 16C950 UART
  - Signals: DCD, TxD, RxD, RTS, CTS, DTR, DSR, GND, RI
  - ±15 kV ESD protection for all serial signals meets IEC1000-4-2 standard
- **Parallel specification:**
  - Data transfer rate up to 1.8 MB/s

- FIFO: 16 byte
- SPP, EPP, ECP, BPP compatible to IEEE 1284
- Windows WHQL certified

---

## System requirements

- Linux Kernel 2.6.x or above
- Windows 7 / 7-64 / 8.1 / 8.1-64 / 10 / 10-64 / 11
- Windows 10 Enterprise LTSC 2019 / Windows 10 2016 LTSC / Windows 10 S
- Windows Server 2012 / Server 2012R2 / Server 2016 / Server 2019
- PC with one free PCI Express slot



---

## Package content

- PCI Express card
- Driver CD
- User manual

---

## Images



## General

Specification:	RS-232 (EIA / TIA) PCI Express 2.0 IEEE1284 SPP, EPP, ECP, BPP
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2012 R2 Windows Server 2012 Windows Server 2016 Windows 11
Slot:	PCIe

## Interface

External:	1 x Serial RS-232 DB9 male 1 x Parallel DB25 female
Internal:	1 x PCI Express x1, V2.0

## Technical characteristics

Chipset:	SUN2410
Data transfer rate:	<b>Serial</b> 115.2 Kb/s <b>Parallel</b> 1,8 MB/s
FIFO:	<b>Parallel</b> 16 byte <b>Serial</b> 128 byte
Operating temperature:	0 °C ~ 60 °C

UART:

**Serial**

16C950

### Physical characteristics

Slot bracket:	standard
Length:	65 mm
Width:	69 mm
Overvoltage protection:	±15 kV ESD Human Body Model (HBM) ±15 kV EN / IEC61000-4-2 Air Gap Discharge ±8 kV EN / IEC 61000-4-2 Contact Discharge