

Delock ISM 169 MHz Antenna RP-SMA plug 0 dBi omnidirectional fixed black

Description

This ISM 169 MHz antenna can be connected to a ISM 169 MHz device with RP-SMA interface, in order to send and receive signals.



Item no. 89462

EAN: 4043619894628

Country of origin: China

Package: Retail Box

Technical details

- Connector: RP-SMA plug
- Frequency range: 164 MHz - 174 MHz
- Antenna gain: 0 dBi
- Horizontal beam: 360 °
- Impedance: 50 Ohm
- Polarisation: linear, vertical
- VSWR: 2.5
- Operating temperature: -30 °C ~ 70 °C
- Housing material: TPR
- Colour: black
- Length: ca. 189 mm
- Diameter:
 - ca. 5.00 mm (top)
 - ca. 13.00 mm (RP-SMA)


System requirements

- Device with a free RP-SMA jack

Package content

- ISM 169 MHz antenna

Images

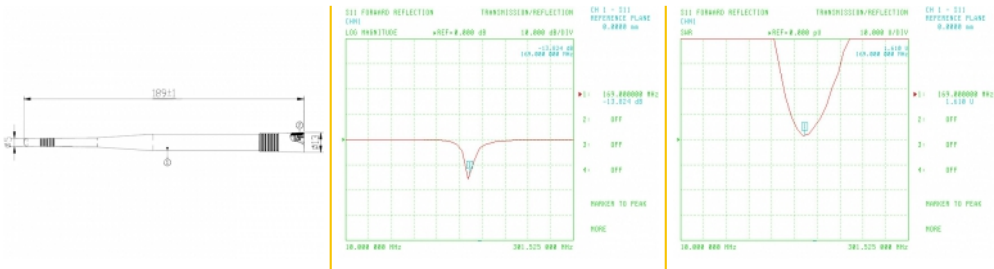

Interface

connector:	RP-SMA plug
------------	-------------

Technical characteristics

Frequency range:	164 - 174 MHz
Gain:	0 dBi
Impedance:	50 Ω
Operating temperature:	-30 °C ~ 70 °C
Polarisation:	linear vertical
VSWR:	2.5

Physical characteristics

Housing material:	TPR
Length:	18.9 cm
Diameter connector:	13 mm
Colour:	black