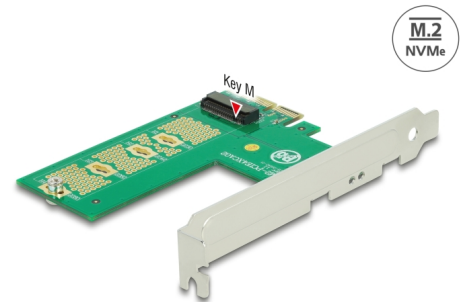# Delock PCI Express x4 Card > 1 x internal NVMe M.2 Key M – cross format

Description

The Delock PCI Express card expands a PC by one M.2 slot. An M.2 SSD in format 2280, 2260, 2242 and 2230 can be connected.

Item no. 89561

EAN: 4043619895618

Country of origin: Taiwan, Republic of China

Package: Box

Technical details

- IOI part number: M2-PCIE4XCA02
- Connector:
  internal:
  1 x 67 pin M.2 key M slot
  1 x PCI Express x4, V4.0
- Interface: PCIe
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm
  application of double-sided assembled modules supported
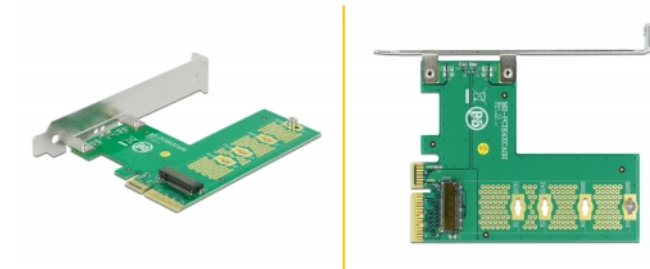- Supports NVM Express (NVMe)
- 2 x LED indicator

System requirements

- Windows 8.1/8.1-64/10/10-64, Linux Kernel 3.19
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

• PCI Express card

Images

© 2024 by Delock. All names and symbols mentioned here are property of the respective producer.
Printing errors, changes and errors excepted.

www.delock.com
89561

2 / 3
04.03.2024

General

Supported operating system:	Linux Kernel 3.19 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Internal:	1 x 67 pin M.2 key M slot 1 x PCI Express x4, V3.0

Technical characteristics

Data transfer rate:	up to 39 Gbps