


# Delock PCI Express Card > 1 x internal USB 3.1 Gen 2 key A 20 pin female

## Description

This PCI Express card by Delock expands the PC by one internal USB 3.1 key A 20 pin female port. Various cables can be connected to the card, to provide either one USB Type-C™ or one USB Type-A interface.

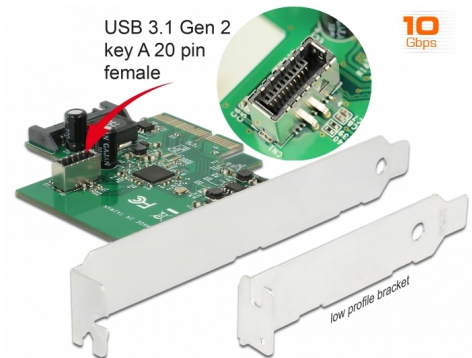

**Item no. 89603**

EAN: 4043619896035

Country of origin: Taiwan,  
Republic of China

Package: Retail Box

## Technical details

- Connectors:  
internal:  
1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) key A 20 pin female  
1 x SATA 15 pin power plug  
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM2142
- Data transfer rate up to:  
SuperSpeed USB 10 Gbps,  
SuperSpeed USB 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.4.x
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

---

## Package content

- PCI Express card
- Low profile bracket
- User manual

---

## Images



## General

Specification:	USB 10 Gbps
Supported operating system:	Linux Kernel 4.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

## Interface

Internal:	1 x PCI Express x4, V3.0 1 x USB 10 Gbps key A 20 pin female 1 x SATA 15 pin power plug
-----------	---

## Technical characteristics

Chipset:	Asmedia ASM2142
Data transfer rate:	10 Gbps

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------