


# Delock PCI Express x1 Card to 2 x Serial RS-232

## Description

The PCI Express card by Delock expands a PC by two external serial ports. Different devices such as scanner, protocol converter, IoT devices etc. can be connected to this card.

### Low Profile Form Factor

By using the included low profile brackets, the PCI Express card can be also installed into a Mini-PC.

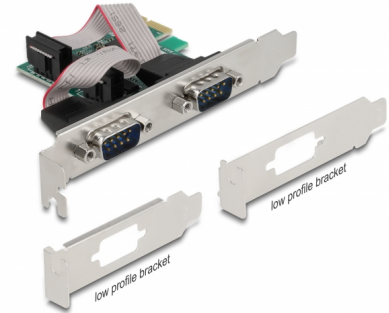

**Item no. 90046**

EAN: 4043619900466

Country of origin: China

Package: Retail Box

## Technical details

- Connectors:  
external: 2 x serial RS-232 DB9 male  
internal: 1 x PCI Express x1, V2.0
- Chipset: ASIX AX99100
- Compatible with 16C950 UART
- Supports Active State Power Management (ASPM)
- Supports Direct Memory Access (DMA)
- Data transfer rate up to 921.6 Kbps
- FIFO: 256 byte
- Databits: 5, 6, 7, 8, 9
- Stop bits: 1, 1.5, 2
- Parity: even, odd, none, mark, space
- Flow control: none, hardware RTS / CTS, software XON / XOFF
- Operating temperature: 0 °C ~ 70 °C

## System requirements

- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot

## Package content

- PCI Express card
- 2 x low profile bracket
- Driver CD
- User manual

## Images



### General

Form factor:	Low Profile (MD1)
Specification:	PCI Express 2.0
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11
Slot:	PCIe

### Interface

External:	2 x serial RS-232 DB9 plug
Internal:	1 x PCI Express x1, V2.0

### Technical characteristics

Chipset:	ASIX AX99100
Data transfer rate:	75, 110, 134, 150, 300, 600, 1200, 1800, 2400, 4800, 7200, 9600, 14400, 19200, 38400, 57600, 115200, 230400, 460800, 921600
FIFO:	1 x 256 Byte
UART:	16C950

### Physical characteristics

Slot bracket:	Low Profile standard
Colour:	green