


Delock PCI Express x4 Card to 1 x external USB Type-C™ 10 Gbps female + 1 x external USB Type-C™ 10 Gbps (DP Alt Mode) female

Description

This PCI Express card by Delock expands the PC by **two external USB-C™ ports**. Different USB devices such as USB flash memory, card reader, external enclosure etc. can be connected.

Video output at USB-C™ port

By using the included cable, the DisplayPort connector of the PCI Express card can be connected to a **DisplayPort output** of a graphics card on the motherboard. Therefore one USB-C™ port will be **DP Alt Mode** capable. A monitor can be connected to this port in order to transmit video and audio signals. The **maximum resolution of the output depends on the input signal**.

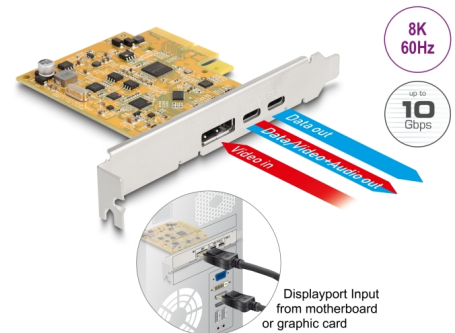

Item no. 90161

EAN: 4043619901616

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - external:
 - 1 x USB 10 Gbps USB Type-C™ female
 - 1 x USB 10 Gbps USB Type-C™ female (DP Alt Mode capable)
 - 1 x DisplayPort female (for DP Alt Mode function)
 - internal:
 - 1 x PCI Express x4 (2-Lane), V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to 10 Gbps
- Resolution up to 7680 x 4320 @ 60 Hz (depending on the system and the connected hardware)
- Power supply via PCI Express interface
- Electrical power per port: max. 7.5 watt (5 V / 1.5 A)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1

System requirements

- Linux Kernel 5.15 or above
- Windows 10/10-64/11
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Graphics card with DisplayPort output (to support DP Alt Mode)

Package content

- PCI Express card
- DisplayPort cable, length ca. 35 cm
- Low profile bracket
- User manual

Images



General

Specification:	eXtensible Host Controller Interface (xHCI) 1.1
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 11 Linux Kernel 5.15 or above

Interface

External:	1 x USB 10 Gbps USB Type-C™ female 1 x DisplayPort female (for DP Alt Mode function) 1 x USB 10 Gbps USB Type-C™ female (DP Alt Mode capable)
Internal:	1 x PCI Express x4 (2-Lane), V3.0

Technical characteristics

Chipset:	Asmedia ASM3142
Data transfer rate:	10 Gbps