


# Delock PCI Express x8 Card to 2 x internal SFF-8643 NVMe - Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by **two SFF-8643** interfaces. SSD's with e.g. **U.2** interface can be connected to these ports by using an optional cable.

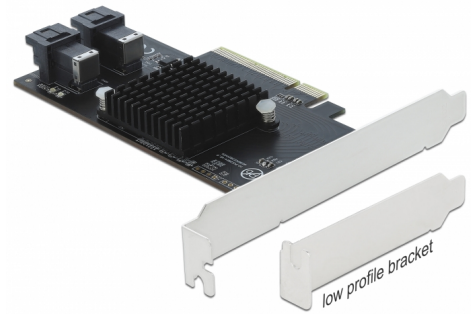

**Item no. 90405**

EAN: 4043619904051

Country of origin: China

Package: Box

## Technical details

- Connectors:
  - 2 x 36 pin SFF-8643 female
  - 1 x PCI Express x8, V3.0
- Chipset: Asmedia ASM2824
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable
- 2 x LED indicator

## System requirements



- Linux Kernel 4.6.4 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x8 / x16 / x32 slot

## Package content

- PCI Express card
- Low profile bracket
- User manual

---

## Images



## General

Form factor:	Low Profile
Function:	Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 4.6.4 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
LED indicator:	2 x

## Interface

Connector 1:	2 x 36 pin SFF-8643 female
Connector 2:	1 x PCI Express x8, V3.0

## Technical characteristics

Chipset:	Asmedia ASM2824
Data transfer rate:	up to 32 Gbps

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	----------------------