


Delock PCI Express x1 kartica na 1 x 2,5 Gigabit LAN

Opis

Delock PCI Express kartica sadrži dva mrežna priključka brzine prijenosa podataka do 2500 Mbps.

NBASE-T za veću brzinu

Suvremene usluge i nove tehnologije zahtijevaju veće pojasne širine. NBASE-T tehnologija omogućava brzine od 1 Gbps i 2,5 Gbps s konvencionalnim radnim mrežnim kabelima. Idealni prijenos postavlja se automatski.

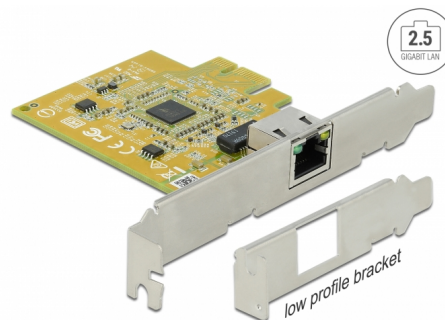

Predmet br. 90440

EAN: 4043619904402

Zemlja podrijetla: China

Pakiranje: Retail Box

Tehnički podaci

- Priključak:
vanjski:
1 x 2,5 Gigabit LAN RJ45 ženski
unutarnji:
1 x PCI Express x1, V2.1
- Skup čipova: Realtek RTL8125AG
- Brzina prijenosa podataka:
Ethernet do 10 Mbps (Half/Full Duplex)
Fast Ethernet do 100 Mbps (Half/Full Duplex)
Gigabit Ethernet do 1000 Mbps (Half/Full Duplex)
NBASE-T s brzinom do 2,5 Gbps (Half/Full Duplex)
PCI Express x1 do 2,5 Gbps
- Kompatibilno s IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Podržava buđenje na LAN (WOL)
- Podržava prioritet kodiranja IEEE 802.1P 2. sloja
- Podržava kontrolu protoka IEEE 802.3x puni dupleks
- Podržava IEEE 802.1Q virtualni LAN (VLAN)
- Podržava 9k Jumbo okvire
- LED indikator povezivanja i šupljine
- Radna temperatura: 0 °C ~ 60 °C


Preduvjeti sustava

- Linux Kernel 3.2 ili noviji
- Windows 7/7-64/8.1/8.1-64/10/10-64
- Računalo s jednim slobodnim PCI Express utorom

Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- CD s upravljačkim programom
- Korisnički priručnik

Slike



General

Supported operating system:	Linux Kernel 3.2 ili noviji Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
-----------------------------	---

Interface

Vanjski:	1 x Gigabit LAN RJ45 jack
Unutarnji:	1 x PCI Express x1, V2.1

Technical characteristics

Skup čipova:	Realtek RTL8125AG
Brzina prijenosa podataka:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps Gigabit Ethernet up to 2.5 Gbps

Physical characteristics

Slot bracket:	niskoprofilni standard
---------------	---------------------------