


Delock MiniPCIe I/O PCIe full size 1 x FireWire A, 2 x FireWire B

Description

This miniPCIe adapter by Delock expands your system by one FireWire A port and two FireWire B ports, which you can lead out via the slot bracket. You can connect different FireWire devices like Card Reader, hubs, cameras etc. to this adapter.

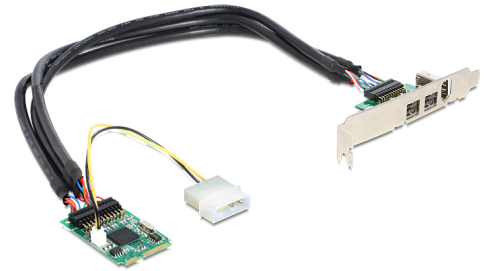

Item no. 95236

EAN: 4043619952366

Country of origin: Taiwan,
Republic of China

Package: Retail Box

Technical details

- Chipset: LSI-LFW643E2
- Form factor: miniPCIe full size
- Interface: PCI Express revision 1.2
- Connector:
 - internal:
 - 1 x 2 pin power connector
 - externally on the bracket:
 - 1 x FireWire 1394A 6 pin female
 - 2 x FireWire 1394B 9 pin female
- Data transfer rate:
 - FireWire A up to 400 Mb/s
 - FireWire B up to 800 Mb/s
- Supports OHCI specifications V1.1
- Hot Swap
- Cable length with connector:
 - FireWire ca. 46 cm
 - power cable ca. 17 cm
- Operating temperature: -10 °C ~ 80 °C

System requirements

- Windows Vista/7/7-64/8/8-64/8.1/8.1-64/10/10-64
- Mainboard with a free miniPCIe slot with a PCIe interface
- PC with one free slot

Package content

- MiniPCIe module
- Connecting cable
- FireWire bracket
- 1 Molex power cable
- 2 screws
- User manual

Images

