


Delock Module MiniPCle I/O PCle full size 2 x Serial RS-232 with 2.5 KV Isolation

Description

This MiniPCle adapter by Delock expands your system by two additional serial ports, which you can lead out through the slot bracket. You can connect different serial devices like printer, scanner, modem etc. to this adapter.

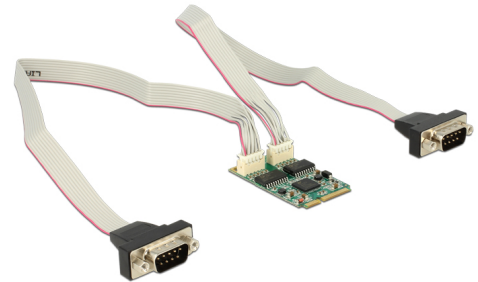

Item no. 95247

EAN: 4043619952472

Country of origin: Taiwan,
Republic of China

Package: Box

Technical details

- Connector:
 - on the module :
 - 2 x 10 pin pin header male
 - on the slot bracket (standard) 1 x:
 - 2 x serial RS-232 DB9 male with screw nuts
 - or on the slot bracket (low profile) 2 x:
 - 1 x serial RS-232 DB9 male with screw nuts
- Chipset: Exar XR17V352
- Form factor: MiniPCle full size
- Interface: PCI Express revision 2.0
- Data transfer rate up to 460 Kb/s
- 2.5 kV isolation
- Compatible with 16C550 UART
- Cable length: ca. 30 cm (incl. connector)

System requirements

- Windows Vista/Vista-64/7/7-64/8/8-64/8.1/8.1-64, Linux Kernel 2.6
- Mainboard with a free MiniPCIe slot with a PCIe interface

Package content

- MiniPCIe module
- 2 x serial connection cable (pin header > DB9)
- Power cable
- 1 x standard slot bracket with two DB9 ports
- 2 x low profile slot bracket with one DB9 port
- Driver CD
- User manual

Images

