


Delock Mini PCIe I/O PCIe full size 1 x USB Type-C™ 3.1 Gen 2 female

Description

This Mini PCIe module by Delock expands the system by one internal USB-C™ port.

Note

This item does not support the USB Type-C™ Power Deliver protocol.

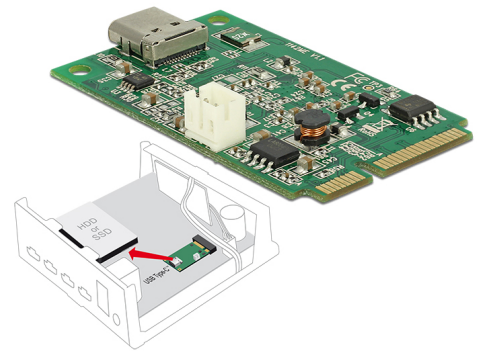

Item no. 95259

EAN: 4043619952595

Country of origin: China

Package: Retail Box

Technical details

- Connectors:
 - 1 x Mini PCI Express, Rev. 1.2
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
 - 1 x 2 pin power connector (5 V)
- Chipset: Asmedia ASM1142
- Interface: PCI Express revision 2.0
- Form factor: Mini PCIe full size
- Data transfer rate:
 - SuperSpeed USB up to 10 Gb/s
 - PCI Express up to 5 Gb/s
- Maximum output power: 15 Watt (5 V / 3 A)
- Supports xHCI specifications V1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0
- Hot Swap
- Supports remote wake-up via USB
- Operating temperature: 0 °C ~ 60 °C
- Storage temperature: -20 °C ~ 70 °C
- Humidity: 5 ~ 95 %
- Over current protection


System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6.x
- Mainboard with a free Mini PCIe slot with a PCIe interface

Package content

- Mini PCIe module
- Driver CD
- Power cable, length ca. 20 cm
- User manual

Images

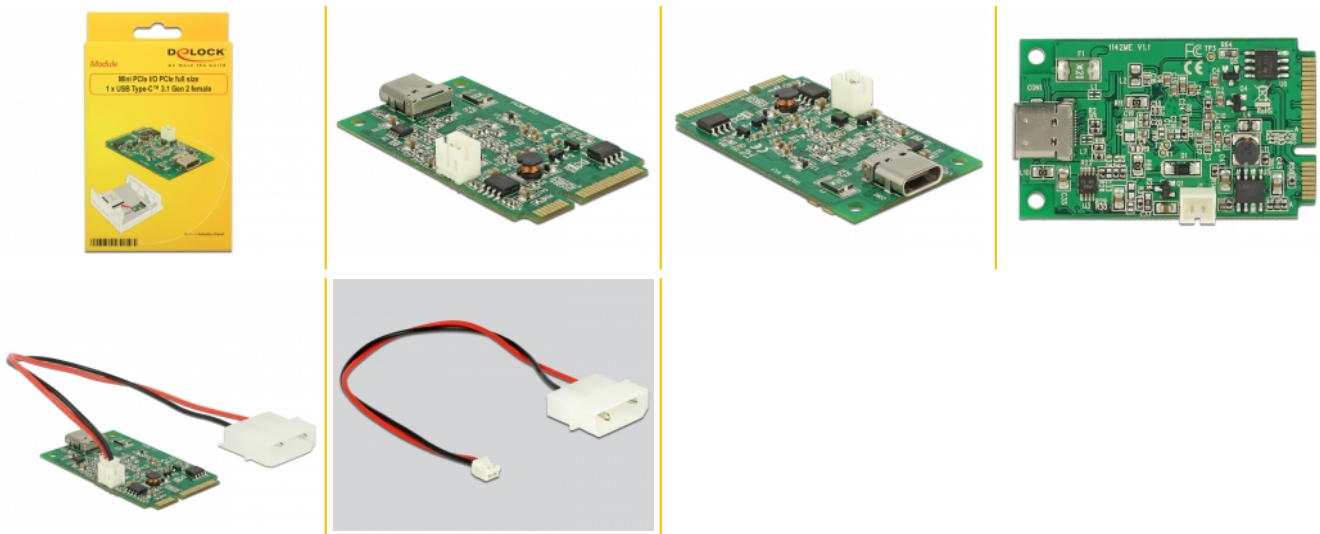

General

Form factor:	Mini PCIe full size
Supported operating system:	Linux Kernel 4.6 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit

Interface

Connector 1:	1 x Mini PCI Express, Rev. 1.2
Connector 2:	1 x USB Type-C™ female

Technical characteristics

Chipset:	Asmedia ASM1142
Data transfer rate:	10 Gbps 5 Gbps
Storage temperature:	-20 °C ~ 70 °C
Operating temperature:	0 °C ~ 60 °C
Humidity:	5 ~ 95 %
Interface:	PCI Express