


Delock M.2 Card to 2 x Serial RS-232 DB9 with Standard and Low Profile slot brackets

Description

The M.2 to serial card by Delock expands the PC by two external RS-232 port. Different devices such as scanners, protocol converters, IoT devices etc. can be connected to the card. With the help of the included slot brackets and RS-232 cables, the M.2 card is suitable for installation into any computer case.

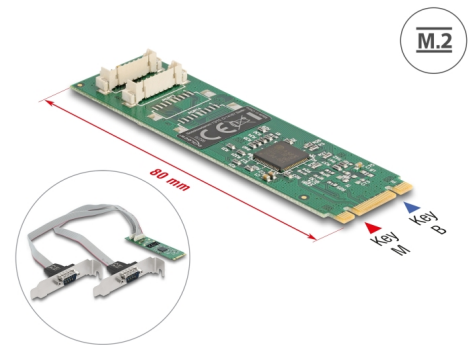

Item no. 95270

EAN: 4043619952700

Country of origin: China

Package: Box

Technical details

- Connectors:
 - 1 x 59 pin M.2 key B+M male
 - 2 x serial RS-232 DB9 male
- Interface: PCIe 2.1 (x1)
- Chipset: ASIX AX99100
- Compatible with 16C950 UART
- Data transfer rate up to 1 Mbps
- Databits: 5, 6, 7, 8, 9
- Flow control: none, Xon / Xoff, RTS / CTS
- Parity: even, odd, none, mark, space
- FIFO: 256 byte
- Supports Active State Power Management (ASPM)
- Supports Direct Memory Access (DMA)
- Supports slow IrDA mode up to 115 Kbps
- Form factor: M.2 2280
- Dimensions (LxWxH): ca. 80 x 22 x 8 mm




System requirements

- Windows 8.1/8.1-64/10/10-64/11
- Windows Server 2016/Windows Server 2019
- A free M.2 key B or key M slot

Package content

- M.2 card
- 1 x fixing screw for M.2 module
- 2 x serial connecting cable (ca. 30 cm)
- 2 x low profile bracket
- 1 x standard bracket
- Driver CD
- User manual

Images



General

Form factor:	M.2 2280
Specification:	RS-232 (EIA / TIA) M.2 PCI Express 2.1
Supported operating system:	Windows 10 32-Bit Windows 10 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Server 2012 R2 Windows Server 2016 Windows Server 2019
Slot:	M.2

Interface

External:	2 x Seriell RS-232 DB9 Stecker (separates LP Slotblech) 1 x Seriell RS-232 DB9 Stecker (separates Slotblech)
Internal:	1 x 59 pin M.2 key B+M male

Technical characteristics

Chipset:	ASIX AX99100
Data transfer rate:	4 x up to 921,6 Kbps
FIFO:	4 x 256 Byte
Operating temperature:	0 °C ~ 70 °C
Signal transmission:	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
UART:	16C950

Physical characteristics

Slot bracket:	Low Profile standard
Colour:	green