

# Delock USB 2.0 Camera Module 5.04 mega pixel 91° V5 fix focus

## Description

This USB 2.0 camera module by Delock offers in a compact construction a high resolution and low power consumption. It is ideally suited for installation in industrial components like IPCs, embedded systems, sensors and in device manufacture. The use of a photosensitive sensor with back side illumination (BSI) expands the scope of this module.



**Item no. 96362**

EAN: 4043619963621

Country of origin: China

Package:

## Technical details

- Connector:
  - 1 x 5 pin USB 2.0 pin header female SMT, pitch 1.00 mm
- Resolution: 5.4 megapixel
- With optical IR filter
- Standard SCCB interface (I<sup>2</sup>C Bus)
- Output support for RAW RGB, RGB565/555/444, CCIR656, YUV422/420, YCbCr422 and compression
- Maximum resolution: QSXGA (2592 x 1944)
- Automatic image control functions including:
  - Automatic exposure control (AEC)
  - Automatic white balance (AWB)
  - Automatic band filter (ABF)
  - Automatic black-level calibration (ABLCL)
- Image quality controls including colour saturation, gamma, sharpness (edge enhancement), lens correction, white pixel canceling, noise canceling, and automatic 50 / 60 Hz luminance detection
- Supports scaling
- Power consumption:
  - Sensor suspend: 90 mA

- sensor active: 140 mA ± 5 mA @ 640 x 480 Pixel
- Operating voltage: 5 V DC
- Operating temperature: 5 °C ~ 50 °C
- Operating humidity: ≤ 80 %
- Sensor size: 1/4"
- Sensitivity: 0.6 V / lx s
- Signal-to-noise ratio (SNR): ca. 36 dB
- Dynamic range: 69 dB
- Fix focus: 0.3 m - infinite
- Aperture: F/3.0
- Frame rates:
  - 30 fps @ HVGA, VGA, XGA, 720p, QVGA
  - 15 fps @ UXGA, 1080p, QXGA
  - 7 fps @ 2592 x 1944
- Dimensions (LxWxH): ca. 60 x 8 x 12 mm

---

## System requirements

- PC with UVC support
- Windows Vista/7/8.1/10
- DirectX 9.0c or above
- Linux Kernel 2.6.15 and above with Video4Linux
- Minimum CPU P4 1.4 GHz, 512 MB RAM


---

## Package content

- Camera Module

---

## Images

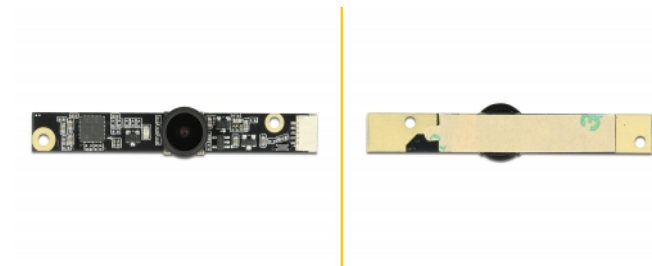

## General

Supported operating system:	Linux Kernel 2.6.15 and above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows Vista 32-bit Windows Vista 64-bit
Operating system requirement:	Windows DirectX from 9.0c Linux with Video4Linux

## Interface

connector:	USB 2.0
------------	---------

## Technical characteristics

Operating voltage:	5 V
Operating temperature:	5 °C ~ 50 °C
Maximum screen resolution:	2592 x 1944 @ 7 fps
Minimum screen resolution:	160 x 144 @ 30 fps
Sensor Size:	1/4"
Current consumption:	140 mA @ 640 x 480

## Physical characteristics

Length:	60 mm
Width:	8 mm
Height:	13 mm