

AX88178 Mac OS X Driver Installation Guide

Revision 3.00
Feb. 26th, 2014

Revision History

Revision	Date	Description
1.00	2010/08/12	Initial release.
1.10	2011/04/27	Modified the script files in Appendix.
1.20	2011/08/15	Added Mac OS X 10.7 support.
1.30	2011/09/14	Modified the description to exclude Mac OS X 10.4 support.
1.31	2011/10/13	Rearranged the document format and added more detailed driver installation/uninstallation procedures information.
1.32	2011/10/14	1. Moved some Section 1 descriptions to Appendix A.
2.00	2012/08/03	1. Changed the document name to "AX88178 Mac OSX Driver Installation Guide". 2. Removed AX88772B/AX88772A/AX88760/AX88772 related information. 3. Added Appendix C "Apple Mac OSX Native USB to LAN Drivers Supported Devices List". 4. Modified some descriptions in Section 1 and 2.
2.01	2012/08/22	1. Added Section 4 "Troubleshooting".
2.02	2012/09/26	1. Modified some descriptions in Section 1.
3.00	2014/02/26	1. Modified to support Mac OS X 10.9 driver installer. 2. Modified some descriptions in Section 1, 2, 3. 3. Replaced Section 4-1 "Driver Installation Failure on OS X 10.8 Issue" with new 4-1 "How to identify the Vendor ID and Product ID of your USB dongle?". 4. Added Section 4-2 "How to identify the installed Mac OS X driver revision?". 5. Removed Appendix A "Script Files Descriptions" and Appendix B "AX88178 Script Files".

Contents

1. Introduction	4
2. Driver Installation Procedures	4
3. Driver Uninstallation Procedures	10
4. Troubleshooting	11
4-1. How to identify the Vendor ID and Product ID of your USB dongle?..	11
4-2. How to identify the installed Mac OS X driver revision?	12
Appendix A. Apple Mac OS X Native USB to LAN Drivers	
Supported Devices List	13

1. Introduction

This document contains the installation and uninstallation information of ASIX's AX88178 Mac OS X 10.5 to 10.8 driver and Mac OS X 10.9 driver.

The native "AppleUSBGigEthernet" driver on Mac OS X 10.5 to 10.9 systems already support some of major AX88178 dongles so users need not to manually install ASIX's standard AX88178 Mac OSX driver if you don't have any issue on Apple's native driver.

Some of AX88178 dongles are not supported by the native "AppleUSBGigEthernet" driver on Mac OS X 10.5 to 10.9 systems so users MUST manually install ASIX's AX88178 standard Mac OSX driver.


Some USB to LAN dongles have manufacturers' own VID/PID. If both Apple's native driver and ASIX's standard driver couldn't work fine with your USB-to-LAN dongle, please contact the support guys of your USB-to-LAN dongle manufacturer for further support.

2. Driver Installation Procedures


The AX88178 Mac OSX driver installation package is "AX88178.dmg".

The following is an example of ASIX's AX88178 Mac OSX driver installation procedures.


Step 1: Click the "AX88178.dmg", the following "AX88178" virtual disk will be appeared on the Desktop of your Mac OSX system. (This "AX88178" virtual disk will be auto-removed after rebooting Mac OSX system.)

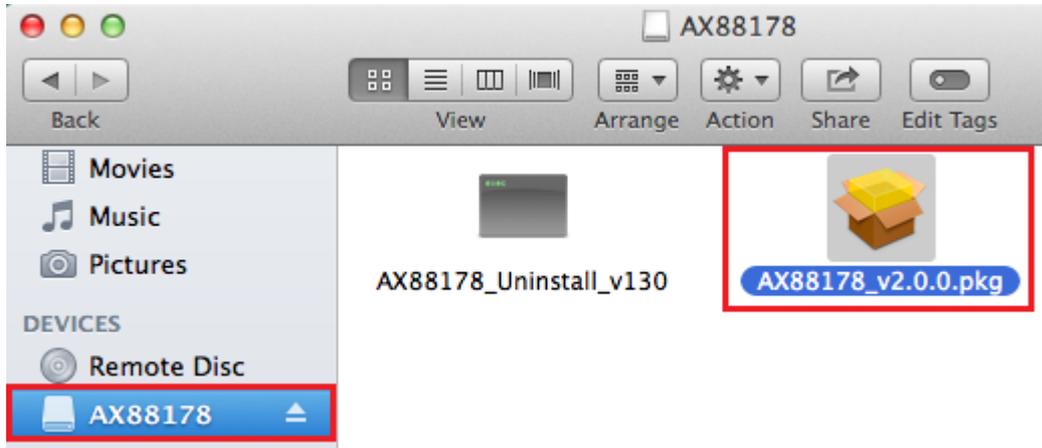

Step 2: Click the “**AX88178_vx.x.x.pkg**” (“x.x.x” is driver revision number), the following driver setup dialog will appear. Click the [Continue] button to start the installation operation and follow the instructions to continue the installation.

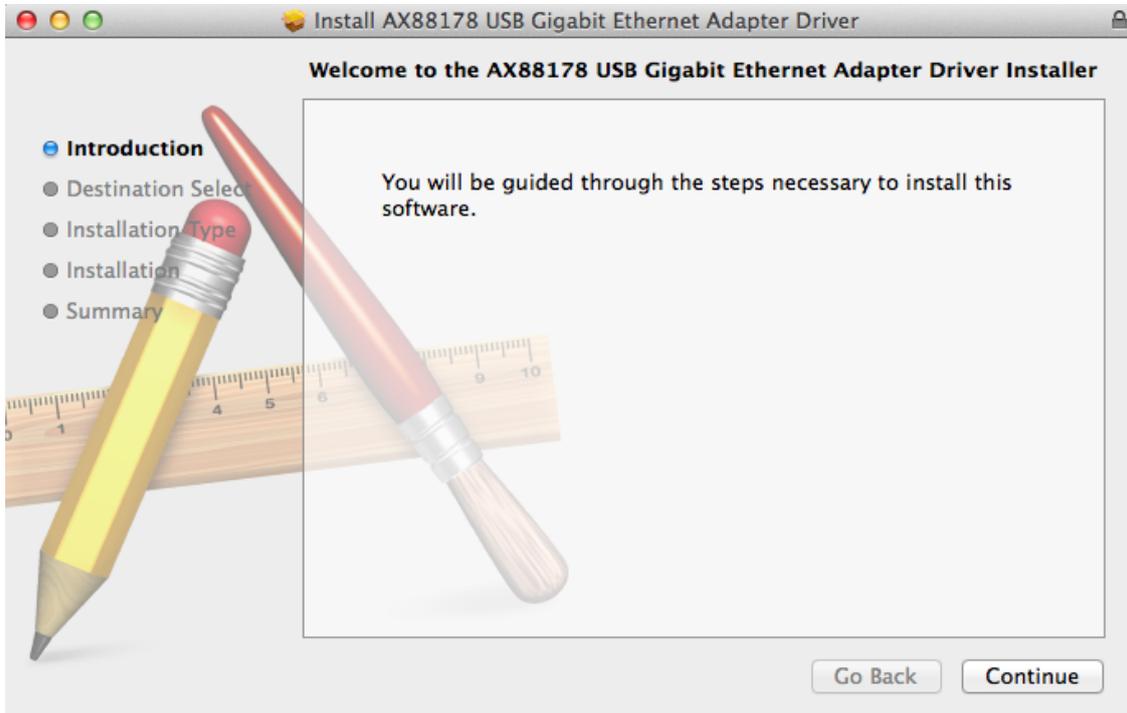

Step 3: Click the [Install] button to continue the installation operation.

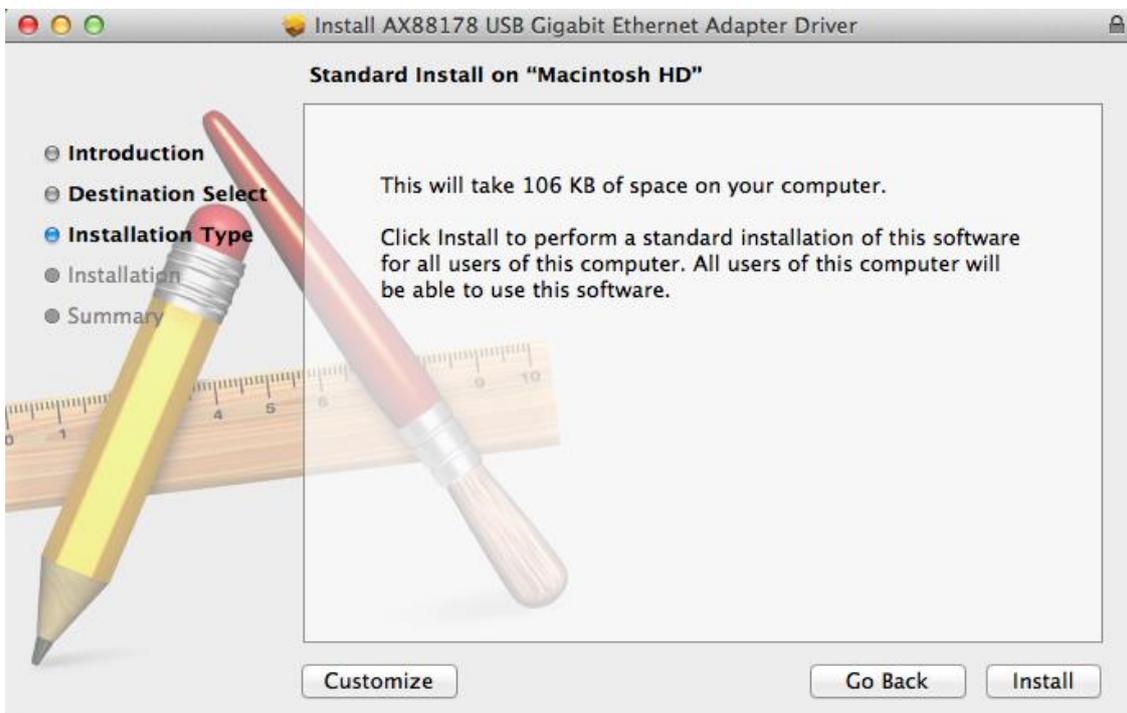


Step 4: You might need to enter your user/password during the driver installation.



Step 5: Click the [Continue Installation] button to continue the installation operation.




Step 6: Click the [Restart] button to restart Mac OSX system to take effect the revised driver installation.

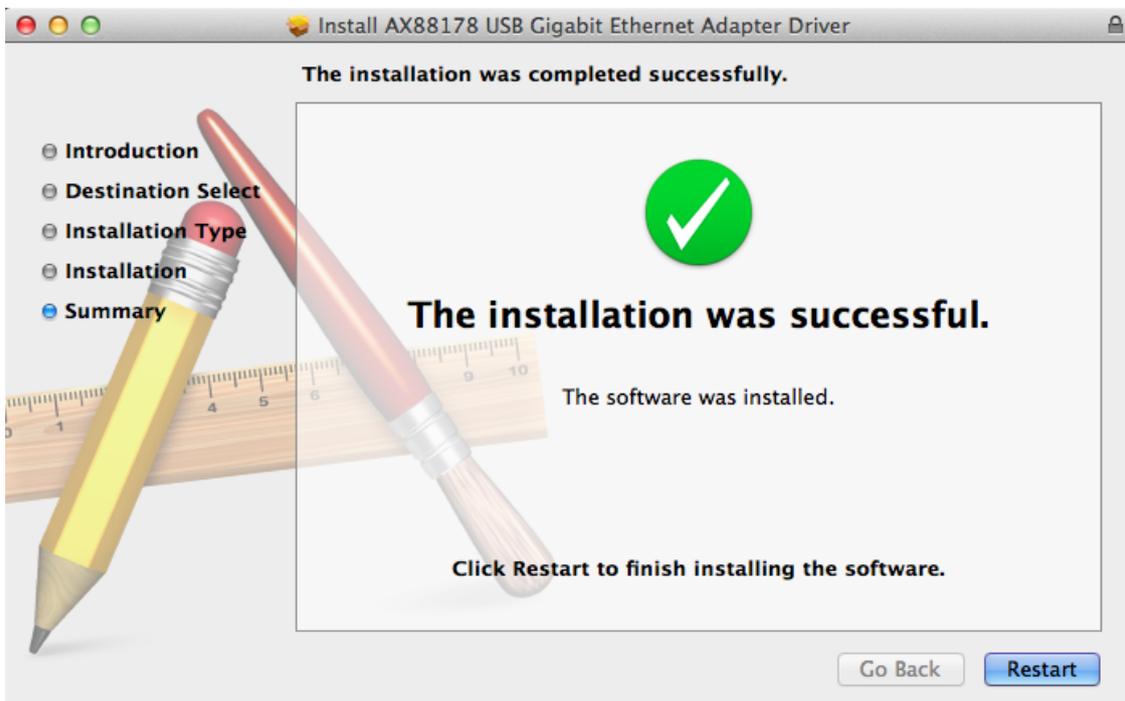

Step 7: After booting up your Mac OSX system, plug your AX88178 USB dongle onto the USB port of your Mac OSX system and refer to the following information to double check if your USB dongle had been identified properly by Mac OSX system and the AX88178 Mac OSX driver was installed correctly or not.


(1) You can check the Vendor/Product ID information of your USB dongle from here.

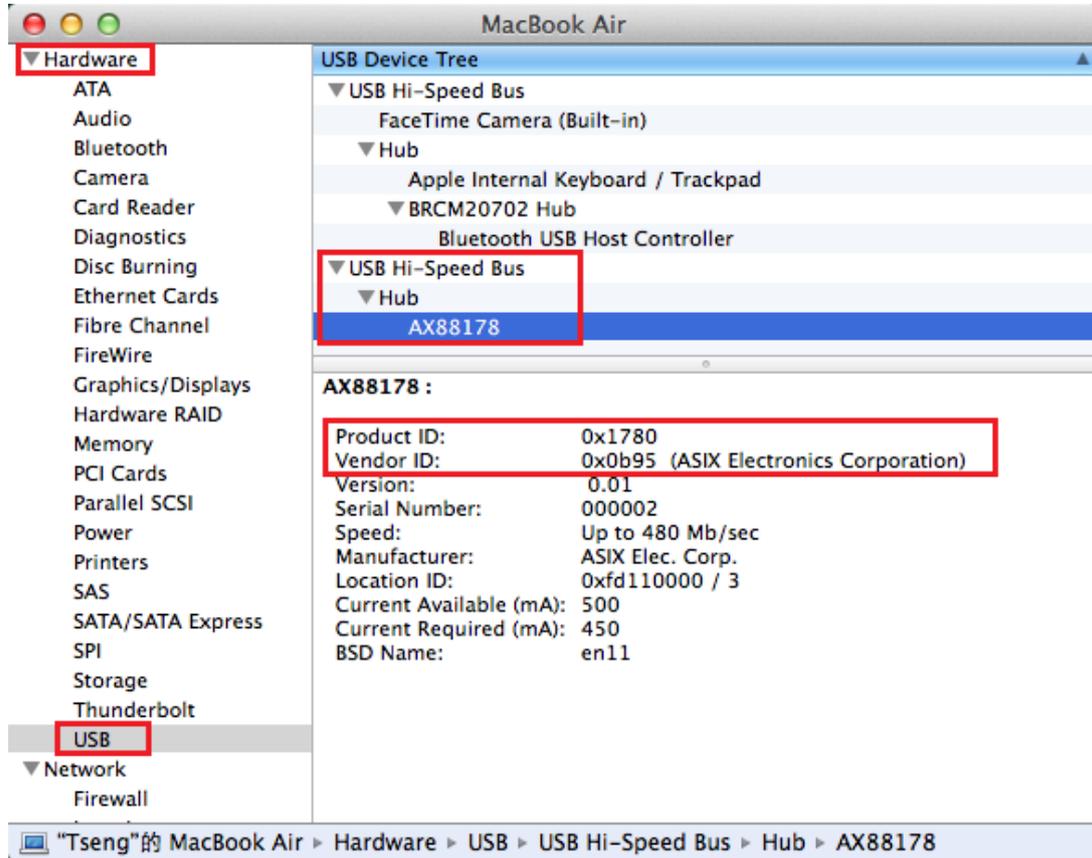



(2) You can check the installed AX88178 Mac OSX driver version information by running the "kextstat" command.

```
Tsengteki-MacBook-Air:~ allan$ kextstat
Index Refs Address          Size      Wired   Name (Version) <Linked Against>
.....
 116  0 0xfffff7f80a49000 0x9000   0x9000  com.asix.driver.ax88178 (1.0.0) <41 36 7 5 4 3 1>
.....
```

Step 8: Please refer to below figure to add a new “USB Gigabit Ethernet” network interface and then press the [Apply] button to take effect the new network interface.

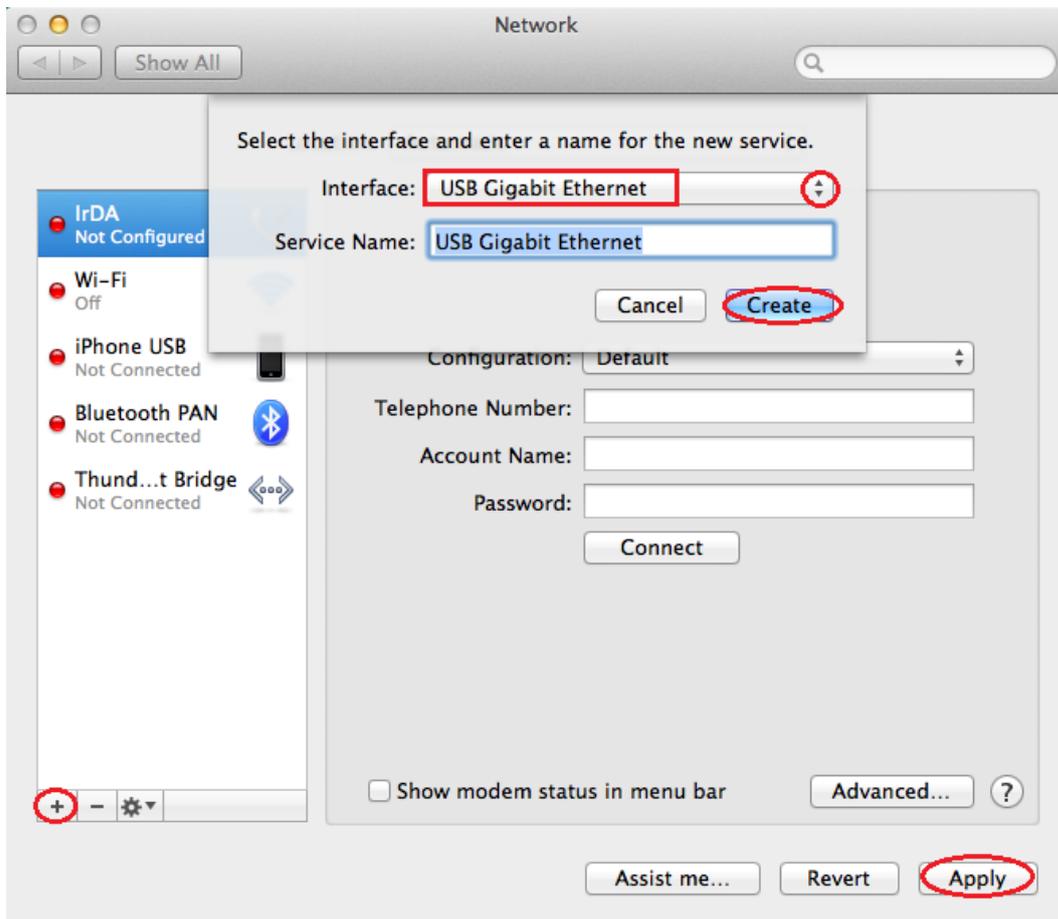


Step 9: The new “USB Gigabit Ethernet” driver should be ready now.

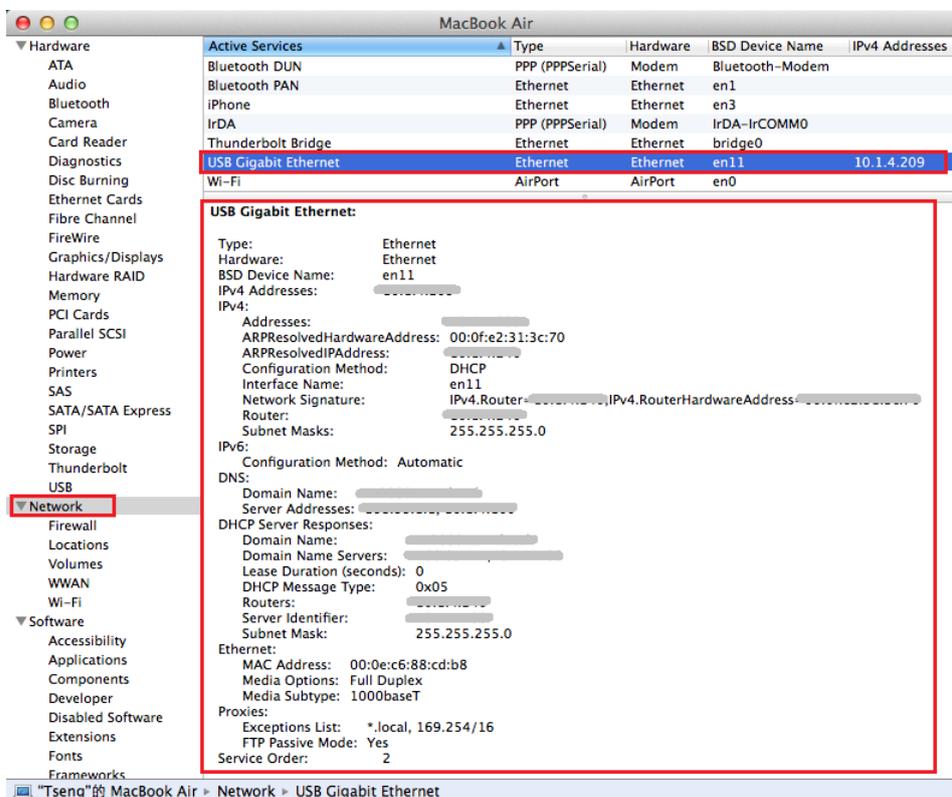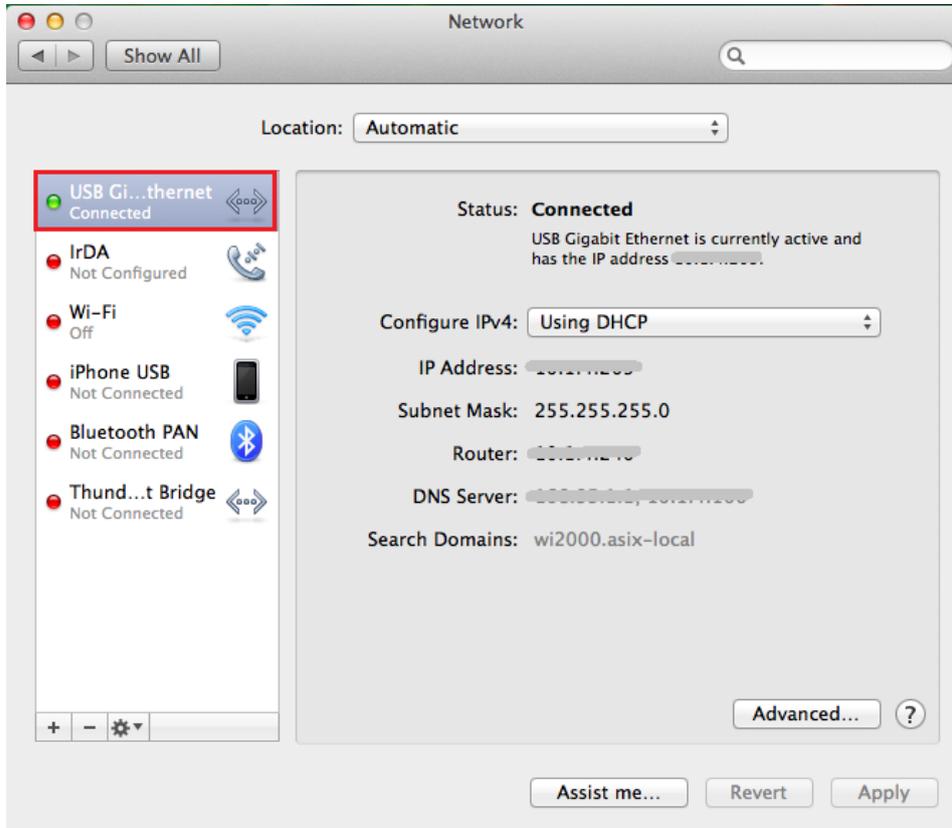

3. Driver Uninstallation Procedures

The following is an example of ASIX's AX88178 Mac OSX driver uninstallation procedures.

Step 1: Click the "AX88178.dmg", the following "AX88178" virtual disk will be appeared on the Desktop of your Mac OSX system. (This "AX88178" virtual disk will be auto-removed after rebooting Mac OSX system.)

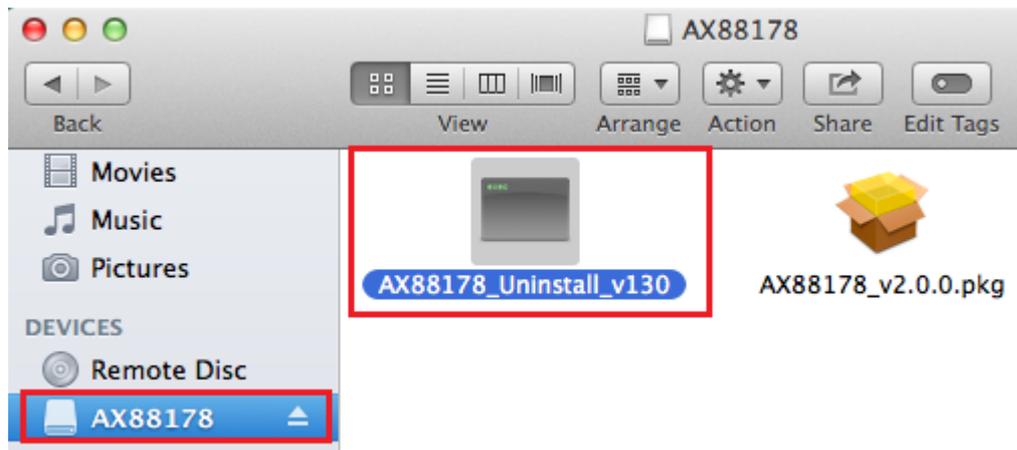

Step 2: Click the "**AX88178_uninstall_vxxx**" utility (xxx is the revision number of the driver uninstaller utility) to uninstall ASIX's AX88178 Mac OSX driver.

```
allan — AX88178_Uninstall_v130 — 80x14
Last login: Wed Feb 26 13:49:24 on ttys003
Tsengteki-MacBook-Air:~ allan$ /Volumes/AX88178/AX88178_Uninstall_v130 ; exit;
AX88178_Uninstall_v130
Darwin Kernel Version 13.0.0
/asix_temp//AppleUSBGigEthernet.kext
Password:
/Library/Extensions//AX88178.kext
com.asix.pkg.ax88178-10.9
Forgot package 'com.asix.pkg.ax88178-10.9' on '/'.
logout

[Process completed]
```

4. Troubleshooting

(The figures in this section are examples for your reference)


Please refer to below sections to provide us the required information for further investigation if you have any problems on AX88178 Mac OS X driver installation.

4-1. How to identify the Vendor ID and Product ID of your USB dongle?

Please refer to below picture to make sure if the Vendor ID and Product ID of your USB dongle are ASIX's default values or not? If no, please contact the manufacturer of your USB dongle to get a proper driver directly.


The following are the AX88178 default VID/PID.

ASIX Product	ASIX Vendor ID	Product ID
AX88178	0B95h	1780h

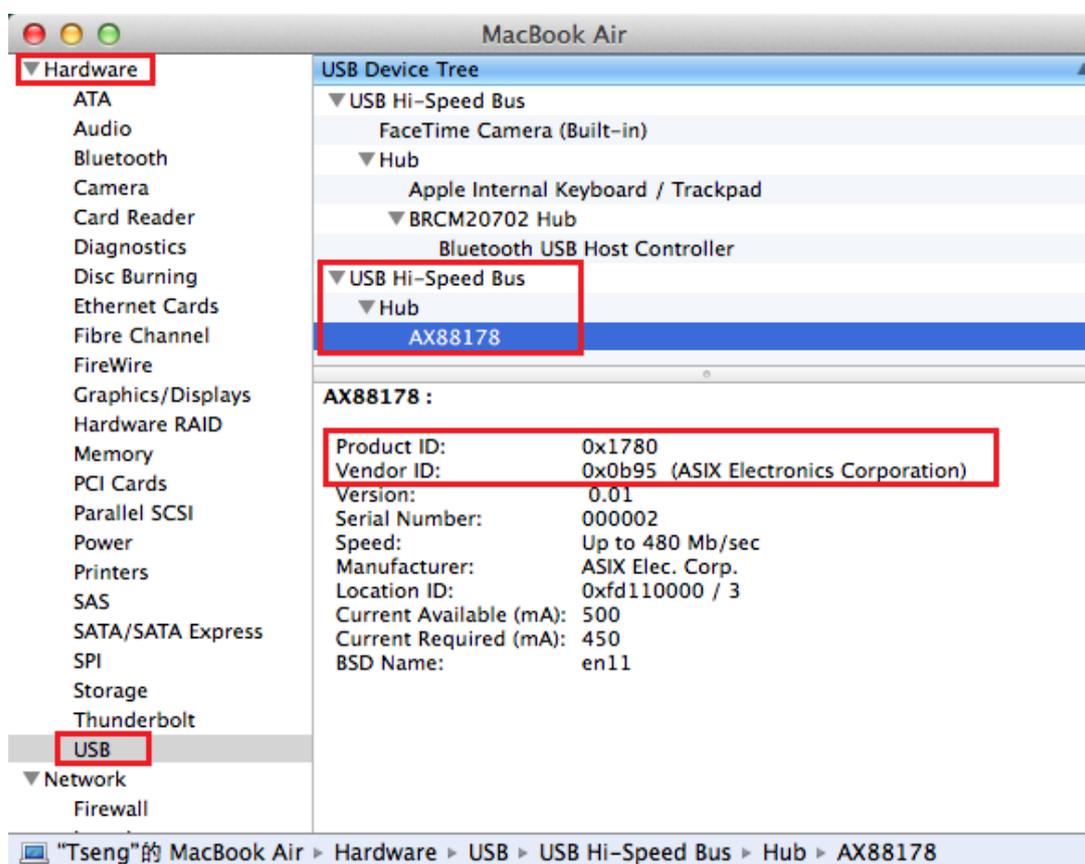

4-2. How to identify the installed Mac OS X driver revision?

Please refer to below picture to identify the driver revision of the installed AX88178 Mac OS X driver.

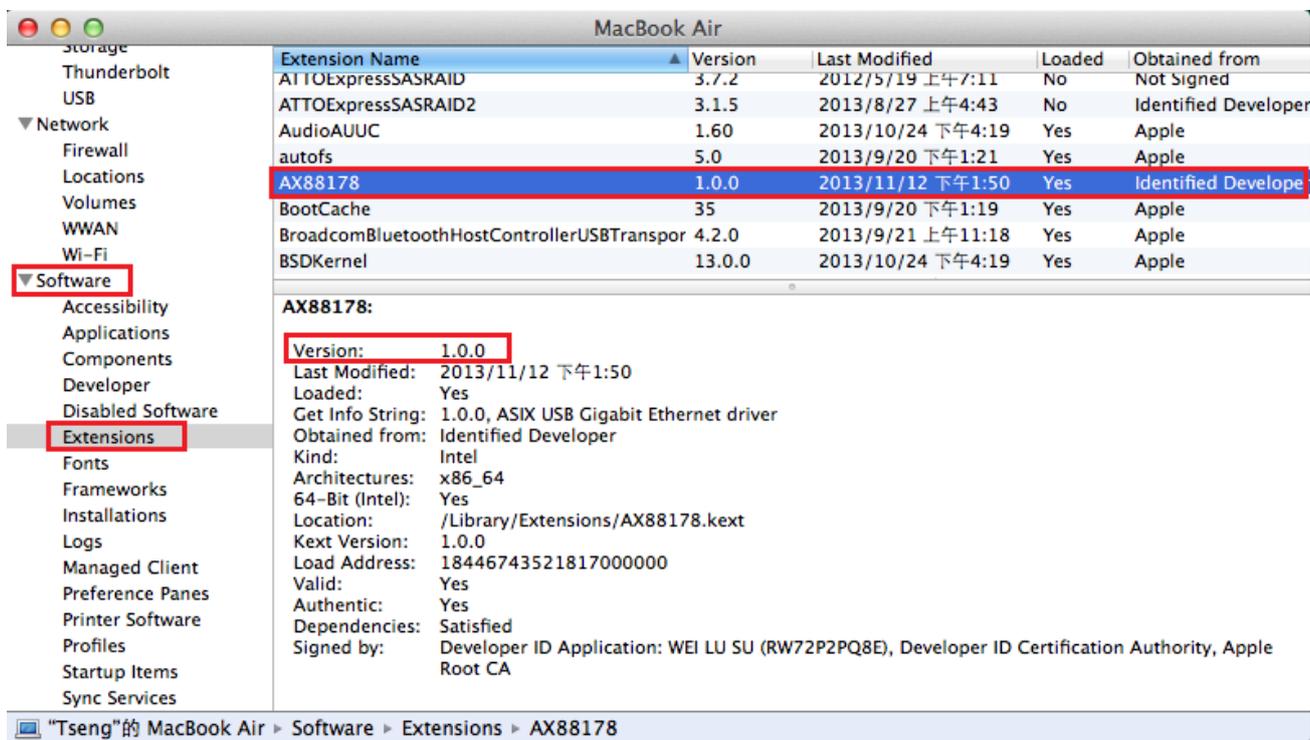

Or run the “**kextstat**” or “**sudo dmesg**” commands in the Terminal console to identify the driver revision of the installed AX88178 Mac OS X driver.

```

Tsengteki-MacBook-Air:~ allan$ kextstat
Index Refs Address      Size   Wired   Name (Version) <Linked Against>
.....
 116  0 0xfffff7f80a49000 0x9000  0x9000  com.asix.driver.ax88178 (1.0.0) <41 36 7 5 4 3 1>
.....
  
```

```

asixs-MacBook-Pro:~ allan$ sudo dmesg
...
AX88178: start - Version number 1.0.0
AX88178: Input buffers 64, Output buffers 64
AX88178: setupChip - PHY ID regs: c912 001c
AX88178: enable - Exit
monitorLinkStatus - Link is up at 1000 Mbps - Full Duplex (PHY regs 5,6:0xc1e1,0x0000)
monitorLinkStatus - Link is down.
AX88178::monitorLinkStatus - Link down
monitorLinkStatus - Link is up at 1000 Mbps - Full Duplex (PHY regs 5,6:0xc1e1,0x0000)
AX88178: willTerminate
AX88178: disable - Exit
AX88178: didTerminate
AX88178: stop - Exit
  
```

Appendix A. Apple Mac OS X Native USB to LAN Drivers Supported Devices List

Apple native drivers "AppleUSBEthernet" and "AppleUSBGigEthernet" on Mac OS X 10.5 to 10.9 systems already support the following AX88178/AX88772A/AX88760/AX88772 USB-to-LAN dongles.

Vendor	Model Name	VID	PID	Comments
ASIX Electronics Corp.	AX88178	0B95h	1780h	
ASIX Electronics Corp.	AX88772A/AX88760	0B95h	772Ah	
ASIX Electronics Corp.	AX88772	0B95h	7720h	
Apple	Apple USB Ethernet Adapter	05ACh	1402h	
Linksys	USB200M	13B1h	0018h	
D-Link Corp.	DUB-E100 Fast Ethernet	2001h	3C05h	
Linksys	USB1000	1737h	0039h	
Belkin Components	F5D5055	050Dh	5055h	
MelCo., Inc.	USB Gigabit Ethernet	0411h	006Eh	
I-O Data Device, Inc.	ETG-US2	04BBh	0930h	

For the other USB-to-LAN dongles with ASIX solution inside, please download the latest ASIX's standard Mac OS X drivers from ASIX web site (<http://www.asix.com.tw/download.php?sub=driver>). If you still have problems, please contact the support guys of your USB-to-LAN dongle manufacturer for further support.

Note: Users should get proper driver from the manufacturer of your USB-to-LAN dongle if both Apple's native driver and ASIX's standard driver couldn't work with your USB-to-LAN dongle.



ASIX Electronics Corporation.

**4F, No.8, Hsin Ann Rd., Hsinchu Science Park,
Hsinchu, Taiwan, R.O.C.**

TEL: +886-3-5799500

FAX: +886-3-5799558

Email: support@asix.com.tw

Web: <http://www.asix.com.tw>