


Delock Converter U.2 SFF-8639 NVMe / SATA 22 pin > 1 x M.2 Key M

Description

This Delock converter enables the connection of a M.2 SSD in 22110, 2280, 2260, 2242 and 2230 format. It allows the possibility to connect a **PCIe or SATA** M.2 SSD. The converter can be installed into your system internally through the SATA 22 pin interface while using a SATA M.2 SSD, or via the U.2 interface while using a PCIe M.2 SSD.

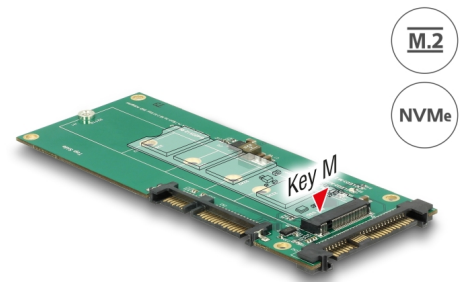

Item no. 62864

EAN: 4043619628643

Country of origin: Taiwan,
Republic of China

Package: Box

Technical details

- Connectors:
 - 1 x U.2 SFF-8639 male (for PCIe SSDs 2 or 4 lanes)
 - 1 x SATA 6 Gb/s 22 pin receptacle (for SATA SSDs)
 - 1 x 67 pin M.2 key M slot
- Interface: SATA / PCIe (2 or 4 lanes)
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Bootable
- Supports NVM Express (NVMe)
- Maximum output current: 3 A
- Over current protection, over heating protection, short circuit protection
- ESD protection up to 2 kV
- Dimensions (LxWxH): ca. 130 x 52 x 6 mm



System requirements

- Linux Kernel 3.20 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- A free U.2 SFF-8639 interface (PCIe SSD) or
- A free SATA 22 pin interface (SATA SSD)

Package content

- Converter
- Mounting material
- User manual

Images



General

| | |
|---|--|
| Function: | Bootable, ex UEFI 2.3.1 NVM Express (NVMe) |
| Supported operating system: | Linux Kernel 3.2 or above Windows 10 32-Bit Windows 10 64-Bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit Windows 11 |
| LED indicator: | power and activity |
| Slot: | PCIe SATA |
| Supported module: | M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported |
| Protection: | ESD (Electrostatic Discharge) Short circuit protection Overheating protection |

Interface

| | |
|--------------|-----------------------------|
| Connector 1: | 1 x U.2 SFF-8639 male |
| Connector 2: | 1 x SATA 6 Gb/s 22 pin plug |
| connector 3: | 1 x 67 pin M.2 key M slot |

Physical characteristics

| | |
|---------|--------|
| Length: | 130 mm |
| Width: | 52 mm |
| Height: | 6 mm |

