


# Delock PCI Express x1 kartica na 2 x RJ45 2,5 Gigabit LAN

## Opis

Delock PCI Express kartica pruža dva mrežna priključka brzine prijenosa podataka do 2500 Mbps.

### NBASE-T za veću brzinu

Suvremene usluge i nove tehnologije zahtijevaju veće pojasne širine. NBASE-T tehnologija omogućava brzine od 1 Gbps i 2,5 Gbps s konvencionalnim radnim mrežnim kabelima. Idealni prijenos postavlja se automatski.

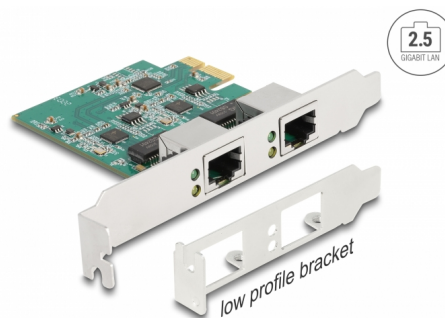

### Predmet br. 88101

EAN: 4043619881017

Zemlja podrijetla: China

Pakiranje: Retail Box

## Tehnički podaci

- Priključak:
  - vanjski: 2 x 2,5 Gigabit LAN RJ45 ženski
  - unutarnji: 1 x PCI Express x1, V2.1
- Skup čipova: Realtek RTL8125B
- Brzina prijenosa podataka:
  - Ethernet do 10 Mbps
  - Fast Ethernet do 100 Mbps
  - Gigabit Ethernet do 1000 Mbps
  - NBASE-T s brzinom do 2,5 Gbps
  - PCI Express x1 do 2,5 Gbps
- Podržava IEEE 802.3 / 802.3u / 802.3ab
- Podržava buđenje na LAN (WOL)
- Podržava prioritet kodiranja IEEE 802.1P 2. sloja
- Podržava kontrolu protoka IEEE 802.3x puni dupleks
- Podržava IEEE 802.1Q virtualni LAN (VLAN)
- Podržava 16k Jumbo okvire
- Podržava PXE
- LED indikator povezivanja i šupljine

---

## Preduvjeti sustava

- Linux Kernel 3.2 ili noviji
- Windows 10/10-64/11
- Računalo s jednim slobodnim PCI Express utorom

---

## Sadržaj pakiranja

- PCI Express kartica
- Nosač niskog profila
- Korisnički priručnik

---

## Slike



## General

Supported operating system:	Linux Kernel 3.2 ili noviji Windows 10 32-bit Windows 10 64-bit Windows 11
LED indikator:	Link and activity

## Interface

Vanjski:	2 x Gigabit LAN RJ45 jack
Unutarnji:	1 x PCI Express x1, V2.1

## Technical characteristics

Skup čipova:	Realtek RTL8125B
Brzina prijenosa podataka:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps Gigabit Ethernet up to 2.5 Gbps

## Physical characteristics

Slot bracket:	niskoprofilni standard
---------------	---------------------------