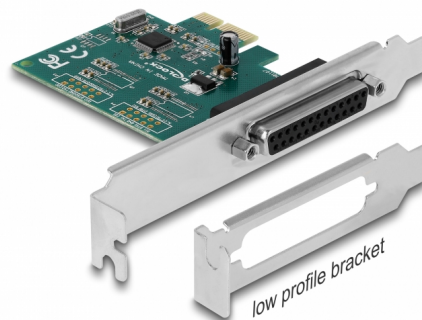


Delock Placă PCI Express la 1 x paralelă IEEE1284

Descriere scurta

Această placă PCI Express de la Delock extinde un PC printr-un port paralel extern. Diferite dispozitive, cum ar fi scanner, imprimantă etc., pot fi conectate la acest card.

**Nr. 90412**

EAN: 4043619904129

Țara de origine: China

Pachet: Retail Box

Detalii tehnice

- Conectori:
 - extern: 1 x paralelă DB25 mamă
 - intern: 1 x PCI Express x1, V1.1
- Chipset: WCH382L
- Rată de transfer a datelor de până la 1,5 Mbps
- FIFO: 256 octeți
- SPP, EPP, ECP compatibil cu IEEE 1284
- Temperatură în stare de funcționare: -40 °C ~ 85 °C
- Umiditate relativă: 0 - 95% (fără condens)
- Dimensiunii (LxlxÎ): aprox. 79 x 59 x 13 mm

Cerinte de sistem

- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- Windows Server 2008 R2/Server 2012/Server 2012 R2/Server 2016
- PC cu slot PCI Express liber

Pachetul contine

- Placă PCI Express
- Consolă minimalistă
- CD cu drivere
- Manual de utilizare

Imagini



General

Formă:	profil redus
Specification:	IEEE1284 PCIe 1.1 SPP, EPP, ECP
Supported operating system:	Windows 10 32-bit Windows 10 64-bit Windows 7 32-Bit Windows 7 64-Bit Windows 8.1 32-Bit Windows 8.1 64-Bit
Slot:	PCIe

Interface

External:	1 x Parallel DB25 female
Internal:	1 x PCI Express x1, V1.1

Technical characteristics

Chipset:	WCH CH382L
Data transfer rate:	1.5 MBps LPT
Data transmission:	Bi-directional

Physical characteristics

Slot bracket:	profil redus standard
Lungime:	79 mm
Width:	59 mm
Height:	13 mm